



# **SAFETY INTERLOCKS**

## **PRODUCT CATALOGUE 2022**





***“Quality means  
doing it right when  
no one is looking.”***


Henry Ford



## THE COMPANY

The company, born in 1965, has over 50 years of experience in the market of handles, locks and mechanical interlocking systems production for MT/AT electric implants. The lock brand **AREL®** is largely recognized as the setting reference of mechanical and electromechanical interlocks. Quality and flexibility in the production of personalized solutions are strength points that gave us the opportunity to occupy a significant, and constantly growing, place in the market.


LISTA DI FORNITURA - LF									
Mag. N°	Consiglieri a	Località	Data	Reparti	Disegn.	Control.	N. Ordine	Sub. N.	
1000000		AL	19-10-82	ATO	25	4	000000	012	
Requisiti	Compte	ALIVEN - VENEZUELA					Disegno d'insieme	Reg.	
							2.139343		
Materiali	Opere	INTERLOCKS							
Chiusura	2.1. PAR. 2.3.7.5. H. 40. 60. AT								
Richiesta N.	Gruppo	N. Gruppo	Descrizione	Dimensioni - Materiali	Disegno N.	Disegno	Disegno	Disegno	Disegno
			FOR FLOW SHEET SEE DRAWING 483966						
1	4		INTERLOCK	TYPE ELIAP (AREL)					
			ANGLE	4.00x60x8 1/2 70 1/2 3/4					
			SCREW	MS x 40					
			NUT	MS					
			FRANGE	WHIRTS					
				1/2 1/4 x 240 TH. 10					
2	19		INTERLOCK	TYPE ELI 1 (AREL)					
			ANGLE	4.00x60x8 1/2 110 1/2 3/4					
			PLAT	4.00x6 1/2 110 1/2 3/4					
			CHAIN	4.00x6 1/2 110 1/2 3/4					
				(N° 6 MESHES GALVANIZED)					

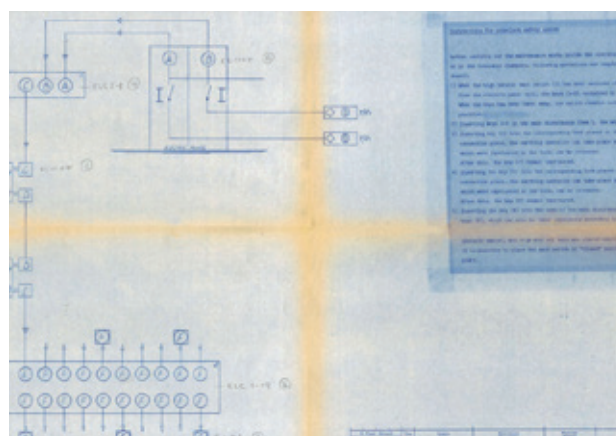

Project of 1982, made in Venezuela. Arel interlocks are included in the design specification.

Frigo Tullio has founded **NEW AREL Srl** in April 2013 as a natural evolution of a multiannual leadership. Such leadership was already established by the **AREL®** brand, reference point in the design of interlock systems. **New Arel**, following the know-how mastered during the course of years, today can count on the professionalism of its highly qualified collaborators. From designers to technicians, from testers to operators, the company operates with competence and expertise with the objective to guarantee systems capable of preventing accidents caused by human errors. We are qualified as suppliers of the main producers of plants for the production and the distribution of electric energy and of the rail sector.

 13 MAG 1985 PER COSTRUZIONE			
TIRANTE FILETTATO		MS x 40	21/2
VITE T.E.	0015733-6.6	MS x 25	1/2
0460	0015583-55	MS	
VITE T.E.	0015733-6.6	MS x 40	21/2
CATENA		4.00x6 1/2 110 1/2 3/4	

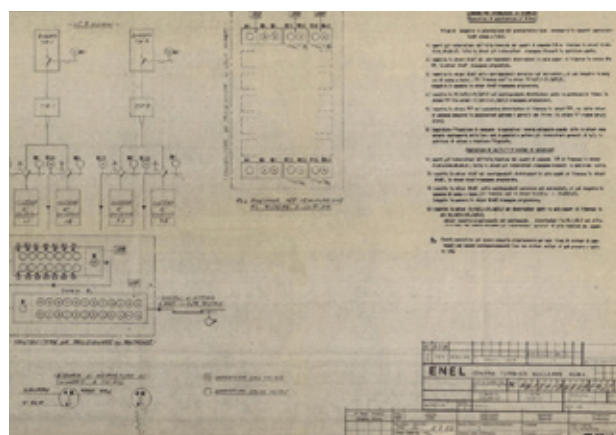

Project of 1985, made for Enel. Arel is again specifically requested in the safety specification.

## BRIEF HISTORY

**1965**



**Tullio Frigo** founded **Arel**, a family business of which he is still President.

**'70s**



Arel in the early 1970s introduced the first modern interlocking systems for people and plant safety in Italy.

**'80s**

The range of products has expanded, including “**quarter turn**”, **handles** and **hinges** for the electrical industry. Thanks to the skills gained in Process Safety Design and its technical know-how in product customization, **AREL®** has become the reference interlocks manufacturer for the entire Italian industry.



In recent years, with Eng. **Gianpaolo Frigo** joining the company, Arel has embarked on a growth path through process management, expansion of product ranges and international development.


**2004**





# SAFETY INTERLOCKS

*An interlock is a closed and interconnected system of locks and elements for the sequential distribution of keys.*

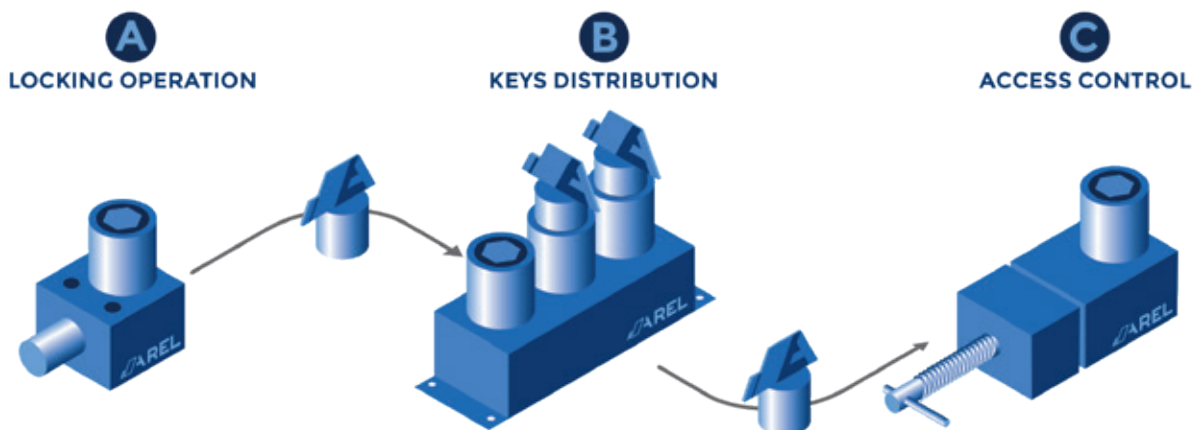

## DESCRIPTION

The fundamental element of the word “interlock” is the prefix “inter”, through which the idea of interconnection of elements and sequentiality of the key distribution is conveyed. Without interconnection and sequentiality, we lose the systemic dimension which differentiates interlocks from simple locks.

Through interconnections and sequentiality of key distribution it is possible to design infinite mandatory sequences of actions. These sequences constitute the physical expression of safety procedures for the blockage of the equipment/machinery in the occasion of inspections and maintenance.

Companies have only two options: leave the application of safety procedures to the conscientiousness of the operators, or, thanks to interlocking, integrate them into the technical system and the working environment. Interconnecting creates rigid sequences of activity and access which reduce the discretionary actions of workers to zero, generating the maximum safety for both workers and equipments during blockage procedures for inspections and/or maintenance.

Maintenance is the most frequent application context for interlocks, which contribute in significantly reducing the number of injuries and deaths on the job.

Arel interlocks are exclusively mechanic or electromechanic. This choice is strictly related to their safety functions, this way reducing the error rate to the minimum, lower than electric or electronic locks, and not generating false positives. In other words they may break but, differently from electric or electronic blocks, they never allow the starting of incorrect and potentially dangerous procedures.




## HOW INTERLOCKS FUNCTION

In order to fully comprehend the great applicative potential of interlocks it is necessary to further explore the functioning mechanisms, that is the way in which the interconnection between the elements of the system and its unequivocal dimension is generated.

Starting point of the system, which is composed by at least two elements, is the functioning mechanism of the single lock and its correct installation. Overlooking the aspects related to the installation, which are important but represent an exogenous variable, we will focus on the lock functioning and we will analytically describe the dimensions of singularity and interconnection between locks which create the uniqueness of the system.

The first dimension of uniqueness lies in the fact that every lock has its own key, expression of a variant among thousands possible combinations. For this reason each key can be considered unique as it is the only one (together with its copies, if requested by the customer) containing the sequence required to open the lock. This dimension guarantees that, during the passage from one element to the other, the “witness” is unequivocally linked to this element of the system.

The second dimension through which uniqueness and interconnection are created is constituted by the functioning mechanism of each single element of the system (the tumbler) which has two possible positions:

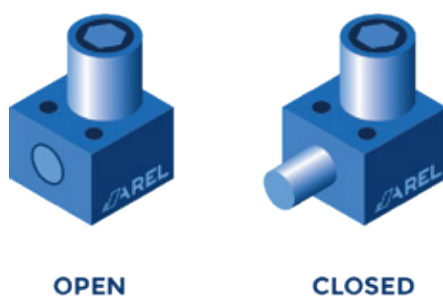


These two positions represent the founding elements of the interlocking language, to which are associated two states:





Through the combination of the first two positions (**Open – Closed**) it is possible to unequivocally define the position of the single element, and through the combination of the two states (**Key trapped – Key free**) it is possible to activate the interconnection with the other elements of the system.

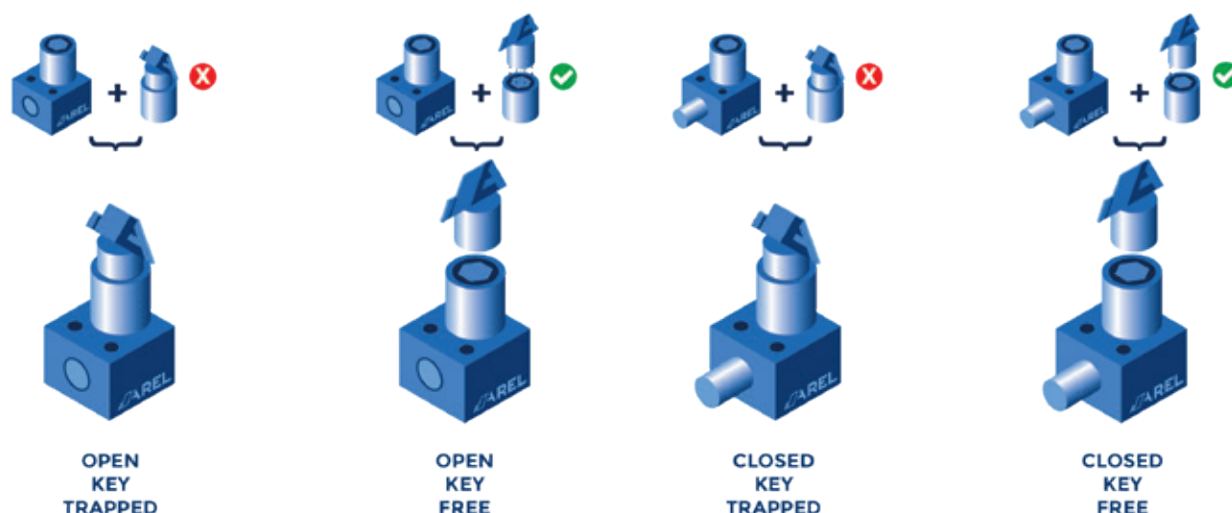

The single elements of the interlocking system are classified in three macro-families of products, differing in their function:



The **LOCKING OPERATION** is the element allowing the isolation of the danger for the worker, being it electrical or mechanic. Through this isolating action the non-dangerous condition of the system is guaranteed.

The **KEYS DISTRIBUTION** is the element allowing to physically and logically interconnect the elements of the system, building connections and multiplying them between the bolt block and the door block.


The **ACCESS CONTROL** is the element regulating the access to the potentially dangerous equipment/machinery on which to operate the inspection or maintenance procedure.



## THE LANGUAGE

During the course of its 50 years of history, **AREL®** has developed its own language for interlocking, allowing the integration of safety procedures into the design of the systems.

The first design schemes were created towards the end of the Fifties and were born from the design tradition of French security.

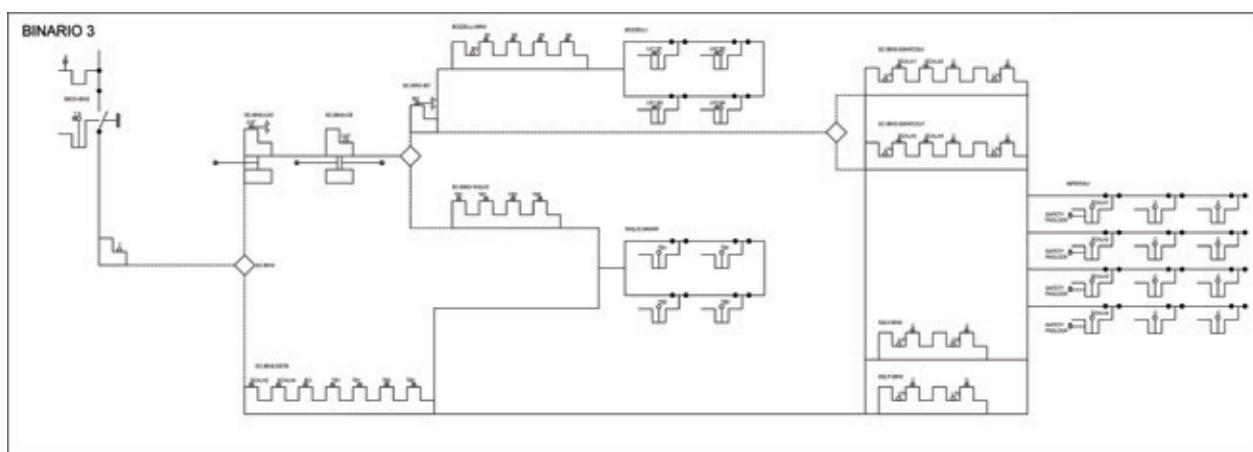

*An application example*

The experiences of design developed during the course of years in different sectors have brought an evolution of design schemes with the development of its own alphabet in which ad hoc developed symbols represent the two sets of positions (**Open – Closed; Key trapped – Key free**) and their combinations with the three families of elements (**Locking operation – Keys distribution – Access control**).

A correct and effective design of the maintenance safety with the application of such a language requires the integrated analysis of the following elements:

- Schemes of the technical design of systems
- Layout of production
- Maintenance safety procedures

**On these schemes the safety design is developed with the integration of the AREL® language on the customer's technical system.**

## INDEX



**ISOLATION**  
**APPLICATION EXAMPLES**  
PG 8

**01**



**KEY EXCHANGE BOXES**  
**APPLICATION EXAMPLES**  
PG 18

**02**



**ACCESS CONTROL**  
**APPLICATION EXAMPLES**  
PG 22

**03**



**ISOLATION**  
**PRODUCTS**  
PG 26

**04**



**KEY EXCHANGE BOXES**  
**PRODUCTS**  
PG 54

**05**



**ACCESS CONTROL**  
**PRODUCTS**  
PG 66

**06**



**KEYS**  
**PRODUCTS**  
PG 76

**07**




# 01

## **ISOLATION** **APPLICATION EXAMPLES**



## ISOLATION

# INTEGRATED SECURITY SYSTEM FOR ACCESS CONTROL TO HAZARDOUS AREAS

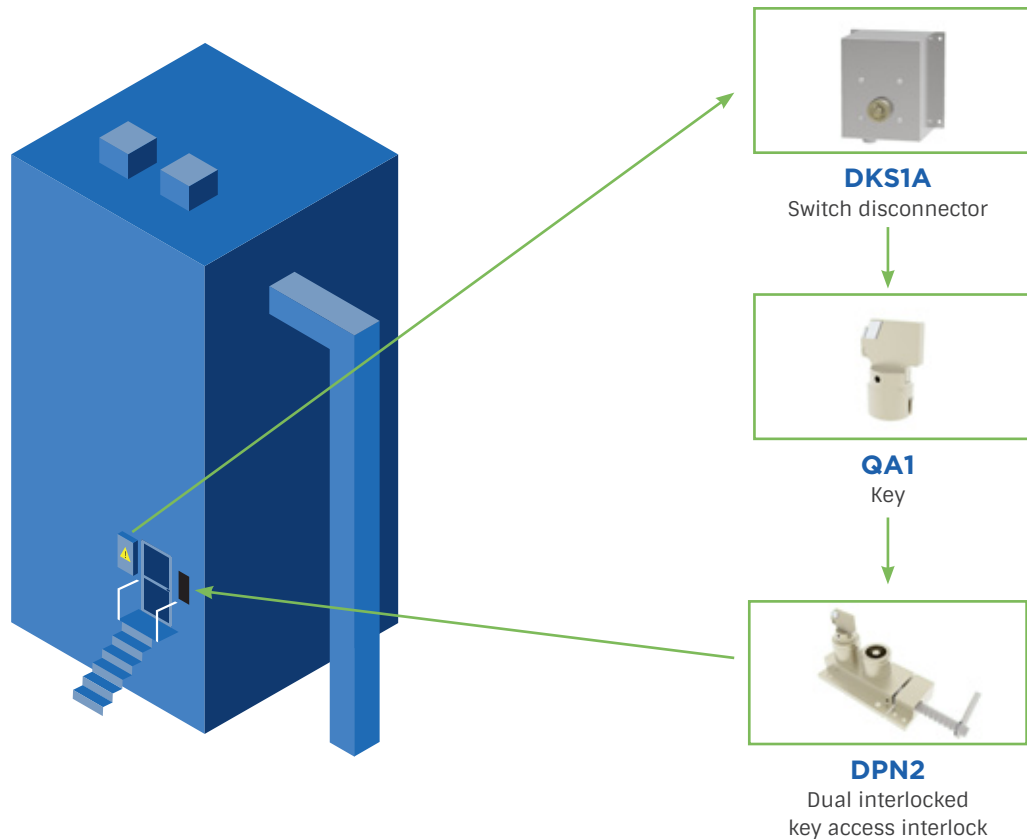

## APPLICATION DESCRIPTION

The key switch for circuit breakers has been designed to function as part of an integrated safety system combined with access control to hazardous areas. Typical machines that use the key switch on disconnecter and switchgears are those at a high risk where, complete power isolation is required before access is allowed. The removal of the key from the operated switch (bolt lock) of the disconnector, changes the conditions of the power supply to the machine, putting it in a safe condition. This key can be removed then and used to unlock access via the door release lock. In this way, the access door can only be opened

when the power supply has been cut or otherwise switched to safe conditions. The machine cannot therefore be restarted until the door is closed and the key removed to be inserted in the operating lock (key switch of the disconnector).




## APPLICATION EXAMPLES

### ISOLATION

# MACHINE GUARDING

ISOLATION

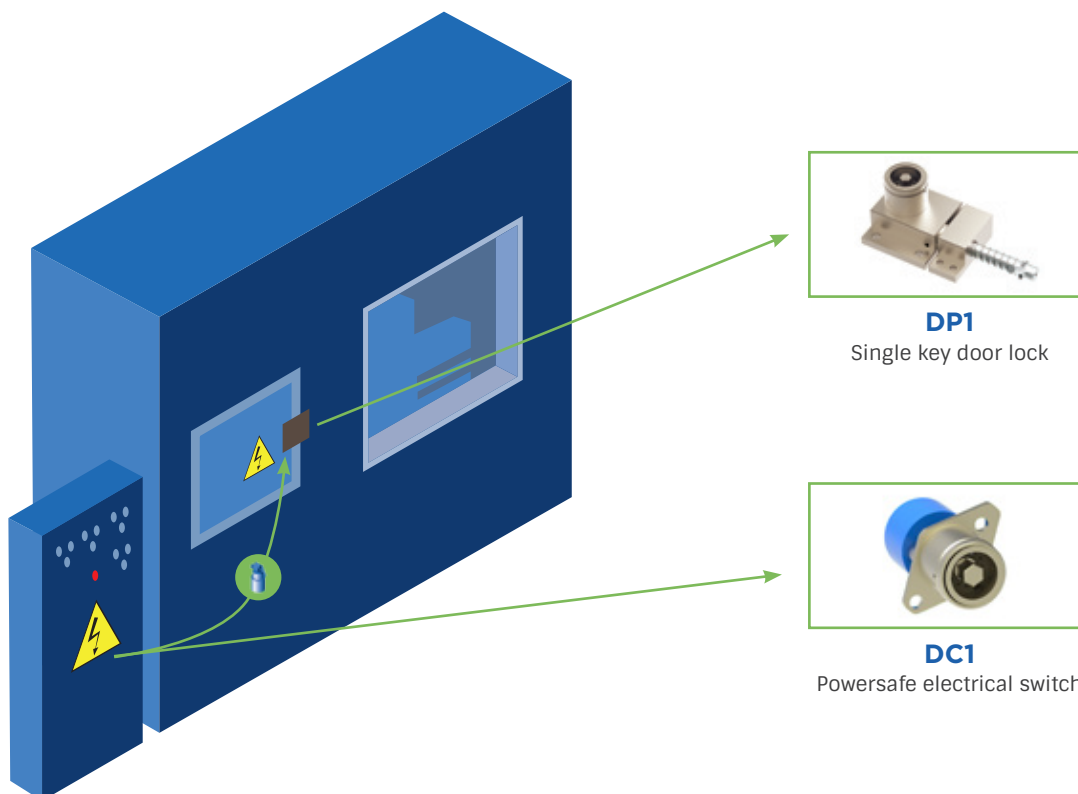


## APPLICATION DESCRIPTION

A typical application for the protection of environments and machinery with multiple access points, provides for the use of an electrical switch with single key operation. It is usually used in conjunction with a single-key access unlocking device. The key-operated electrical switch interrupts the machine's safety circuit, ensuring that the machine is locked when the key is turned and removed. The key can then be inserted in the access unlocking lock to open the door or trapdoor. The machine can not be restarted until the door is locked again,

which is then removed and brought into the electric lock switch.

## ISOLATION

# PROTECTION OF MACHINERY WITH MULTIPLE ACCESS TO HAZARDOUS AREAS

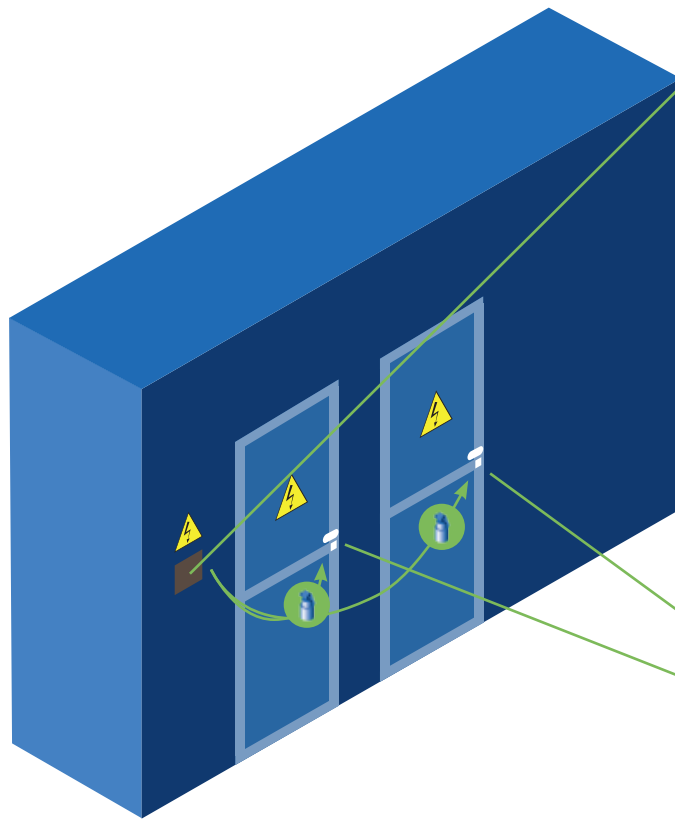**D1BCPX**

Elettro-mechanical  
interlocking distributor

**QA1**

Key

**D12**

Key distributor

**DPN2**

Dual interlocked  
key access interlock

## APPLICATION DESCRIPTION

A typical application for the protection of environments and machinery with multiple access points, provides for the use of an electric switch with multiple operating keys. It is usually used in combination with a double and interlocked keys device for access with the whole body.


The typical interlocking system operates by isolating the machinery and controlling access to dangerous areas. The removal of the power isolation key from the interlock changes the condition of the power supply to the machinery, putting it in safe conditions and

enabling the release of the keys to the personnel. These keys can then be used to unlock the double key access locks.

The protections can only be opened when the power supply has been put in a safe condition and only when all the keys have been re-inserted into the electric key-operated lock switch can the machine restart.



# ACCESS CONTROL TO UNINTERRUPTIBLE POWER SUPPLIES (UPS)

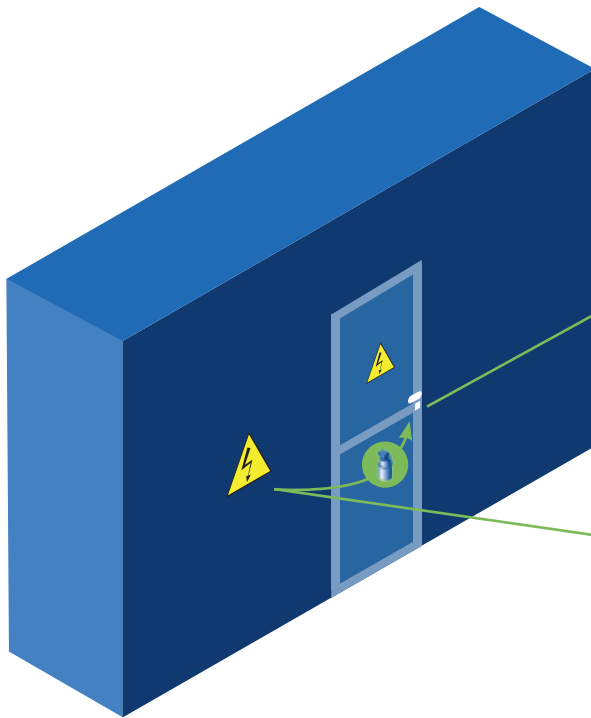

**DPN2**  
Dual interlocked  
key access interlock



**DKS1B2CPX**  
Solenoid controlled switch

## APPLICATION DESCRIPTION


A typical application for controlling access to uninterruptible power supplies (UPS) is the use of a solenoid-controlled key switch.

When the machinery is in a safe state to allow access; the UPS system sends a signal to the lock to energize the solenoid, thus allowing the rotation and extraction of the key. Interrupting the UPS power supply.

The key can then be taken to access the protected area. The UPS can not start until the key is removed and taken to the key switch.

## ISOLATION

## SECURITY SYSTEMS FOR SAFE CONTROL OF SWITCHES OR VALVES THAT PREVENT ACCESS TO DANGEROUS AREAS

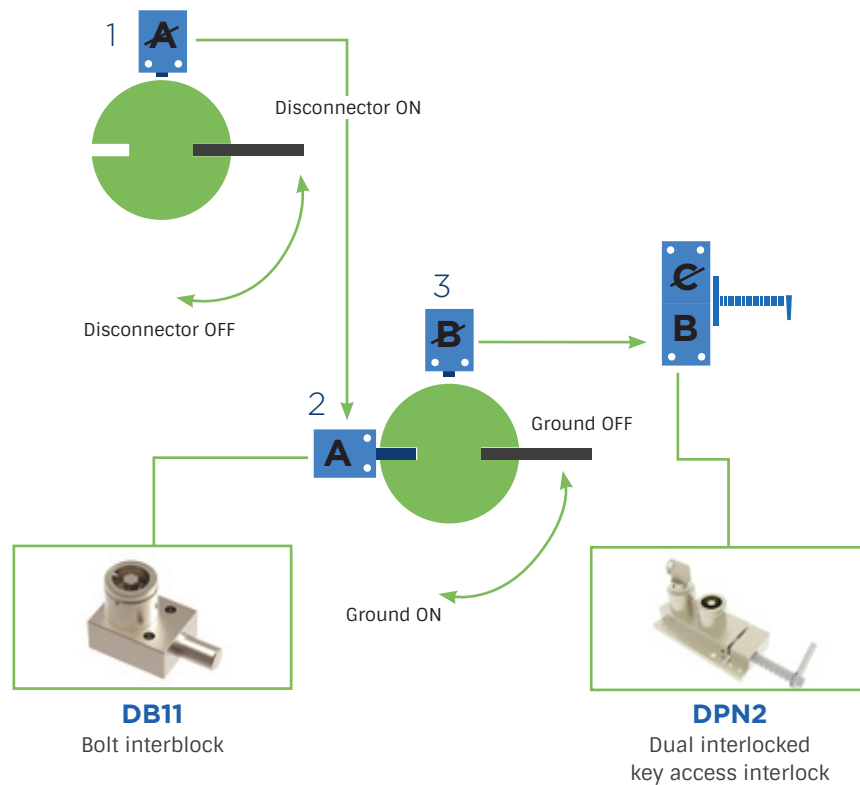

## APPLICATION DESCRIPTION

These are security systems that use mechanical key interlocks. While power to the system is activated, the access doors to the hazardous area remain locked. The key A remains locked in the lock (1) while the process is activated and the line is powered. To access the hazardous area, the disconnecter is moved to the OFF position and the bolt A is advanced, locking the disconnecter in the open position (OFF). Key A is then picked up and taken to the grounding switch. By inserting and turning the key A in the second lock (2), the operation of the grounding lever is released. Once rotated, the slot on the lever aligns with the next lock

lock (3), whose key B is trapped in the lock. Now the key B can be removed from the lock (3), thus locking the lever in the closed position, ensuring that the earth connection can not be interrupted. The system is now disconnected and connected to earth, the B key can be used to operate the access unlocking lock on the dangerous area door to access it.




## APPLICATION EXAMPLES

### ISOLATION

# BLOCK ACCESS DOORS TO HAZARDOUS AREAS WHEN USING ELECTRIC OR PNEUMATIC MACHINERY

ISOLATION

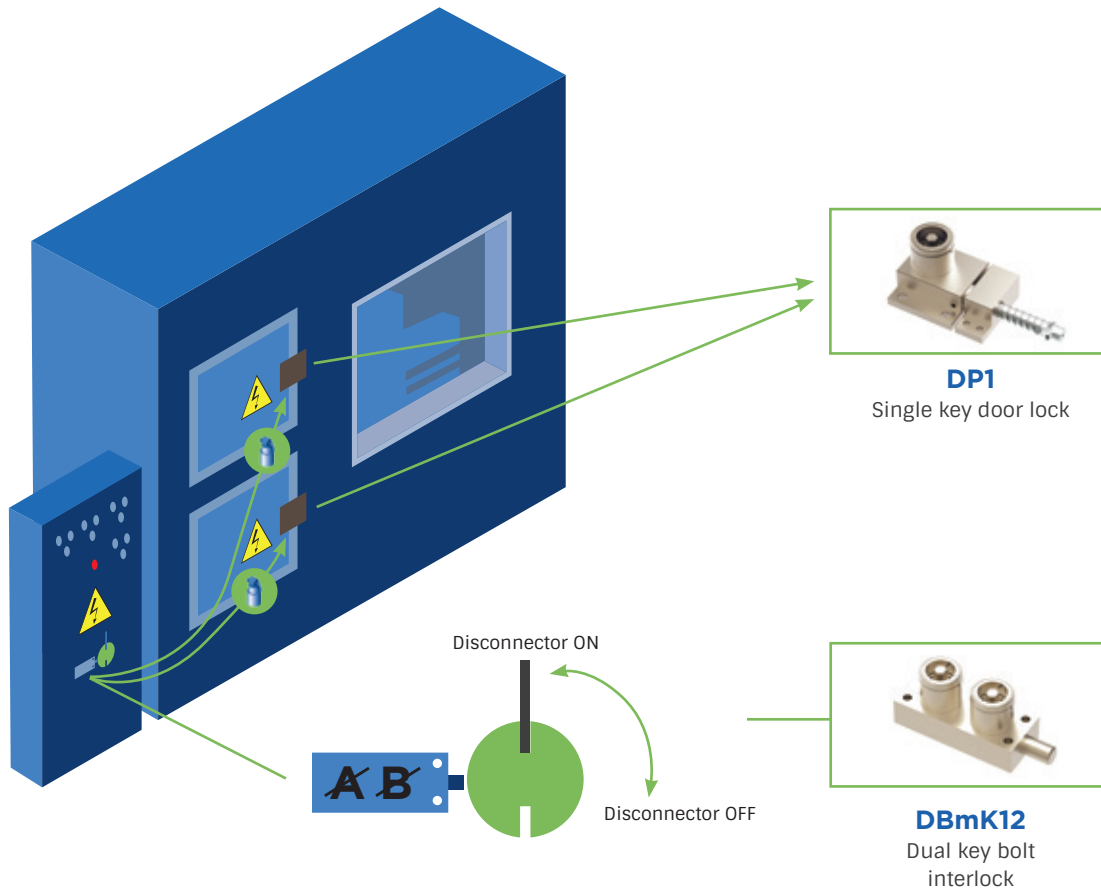


## APPLICATION DESCRIPTION

An application in the field of electrical and pneumatic equipment supplies is to create a safety system in which the double key operation blocks are used to block the access doors to the hazardous area while the machinery is switched on. The keys A and B are locked in the bolt lock, preventing access to the machine area. To enter the area, the pneumatic supply must be switched off. Turning the keys in the double-handle bolt block will extend its bolt. The release of the keys ensures that the bolt remains in the extended position by blocking the disconnecter. The released keys

can now be transferred to the machine area to gain access through the access interlocks. The disconnecter can not be switched on until both access doors are locked and both keys are inserted in the double key operated lock.

## ISOLATION

# BLOCK THE ACCESS DOOR TO A DANGEROUS AREA WITH LIGHT SIGNALING WHEN USING ELECTRIC OR PNEUMATIC MACHINES

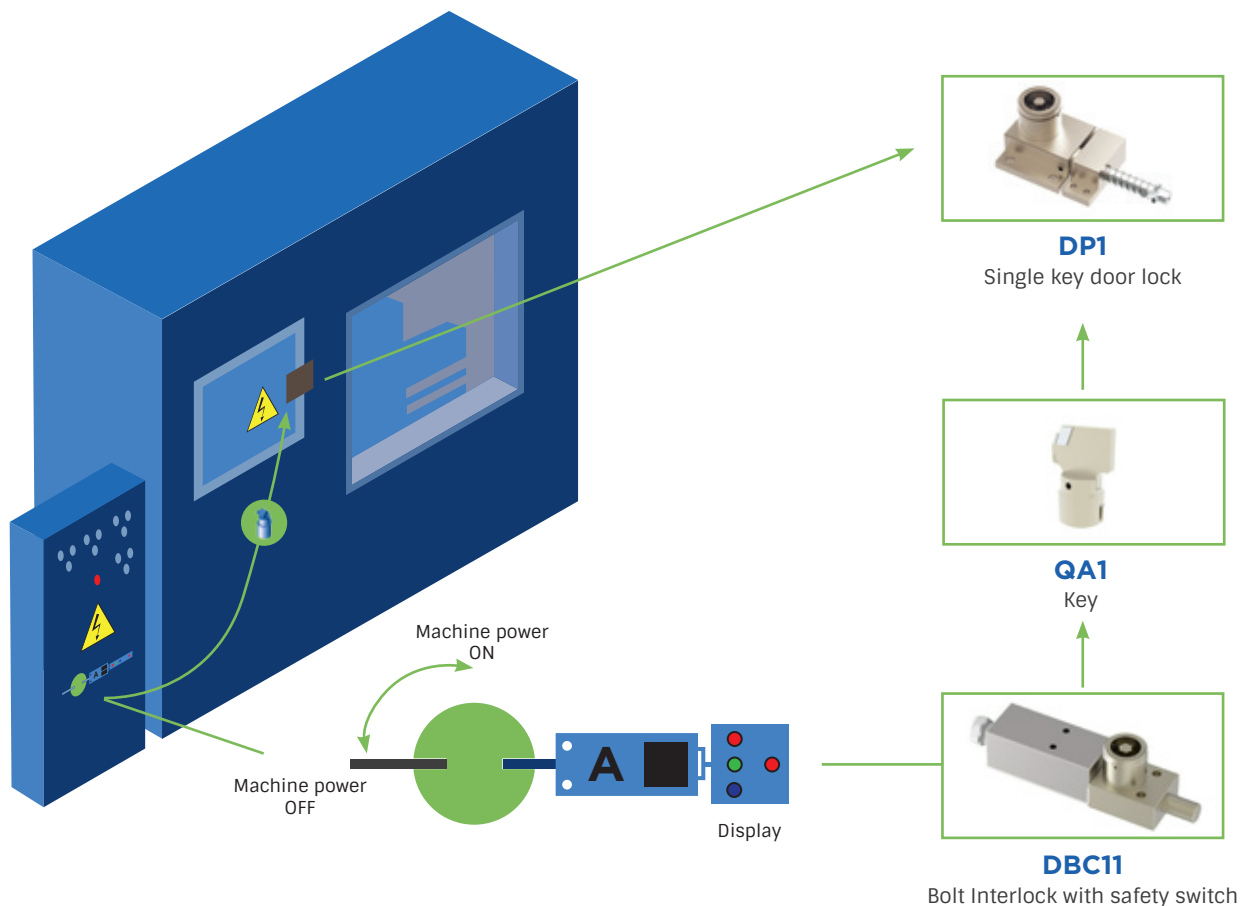

## APPLICATION DESCRIPTION

The bolt locks with safety switches are used as part of a safety system, typically in electrical cabinet applications. The power supply to the machine is switched on and the protective door of the hazardous area is blocked. The key is trapped in the interlock. Before entering the machine area, the isolator lever must be turned to isolate the machine. To lock the isolator lever in the safety position, it is necessary to rotate the key in the interlock by extending the bolt. The removal of the key traps the bolt in the extended position. The interlock operation also changes the contacts in


the switch. This is connected to a traffic light or to another display, so indicating that it is possible to gain access to the machinery area. The removed key is brought to the access lock to allow it to be opened. The power supply can not be reactivated until the key is trapped in the door lock.

## APPLICATION EXAMPLES

### ISOLATION

# NEED TO ENSURE THAT MORE ARRIVALS ARE NOT PUT IN PARALLEL

ISOLATION

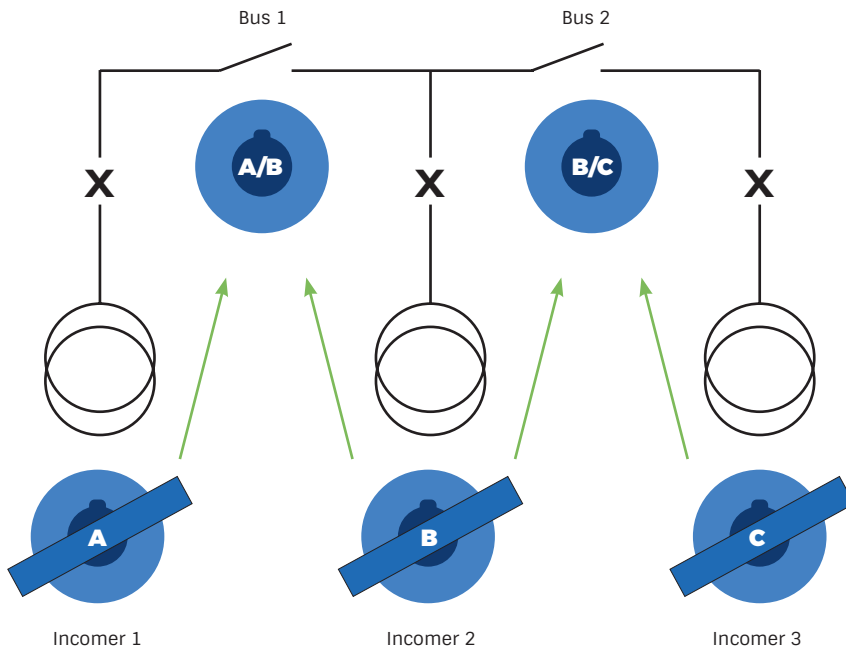


## APPLICATION DESCRIPTION

The MC interlocks are used to ensure that multiple arrivals are not put in parallel. When all the incomers are closed, the busbars are open. In the example, to close Bus 1, the arrival A or B must be opened. The key is removed from the A or B lock and inserted into the bus switch A/B. To close Bus 2, B or C must be open and the B or C key transferred to the B/C switch.



## ISOLATION

# INTEGRATED SECURITY SYSTEM THAT CONTROLS ACCESS TO HAZARDOUS AREAS WITH TIME DELAY

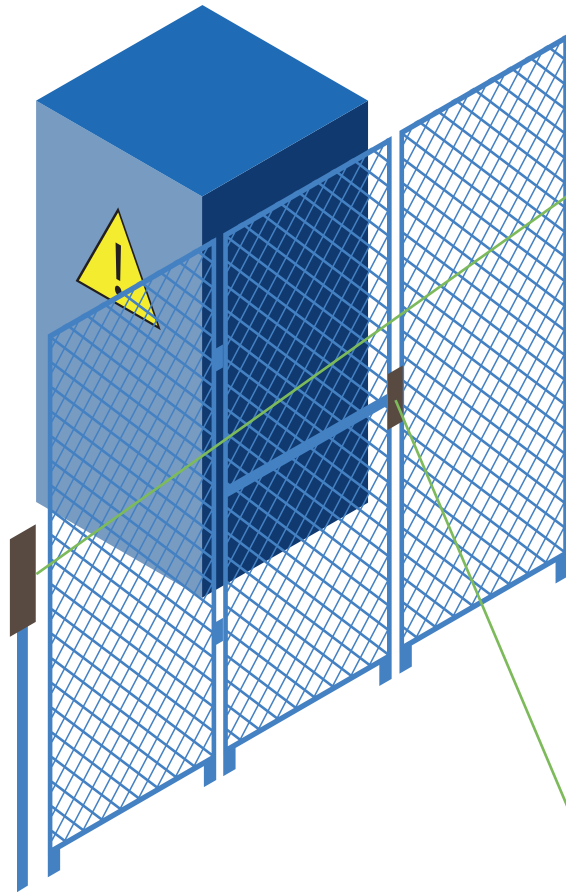

## APPLICATION DESCRIPTION

In a typical application, the mechanical delay unit is designed to function as part of an integrated security system that controls access to hazardous areas. The removal of the isolation key (key A) from a key switch, e. g. DC, interrupts the power supply to the machine. The key A is then inserted into the time delay unit and activated, starting the timer. After the timeout period has been completed, another key can be released (key B) (the delay must be greater than the machine stop time). The key B can then be brought to the access lock DP1 and the machine room door can be opened. The machine

**DC1**

Powersafe electrical switch

**QA1**

Key

**D11BCPXT**

Electro-mechanical interlocking distributor

**QA1**

Key

**DP1**

Single key door lock

can not be restarted until the door is closed and the key is returned to the time delay unit.


# 02

## KEY EXCHANGE BOXES APPLICATION EXAMPLES



## KEY EXCHANGE BOXES

# PROTECTION OF MACHINERY WITH ONE OR MORE ACCESS POINTS TO THE HAZARDOUS AREA

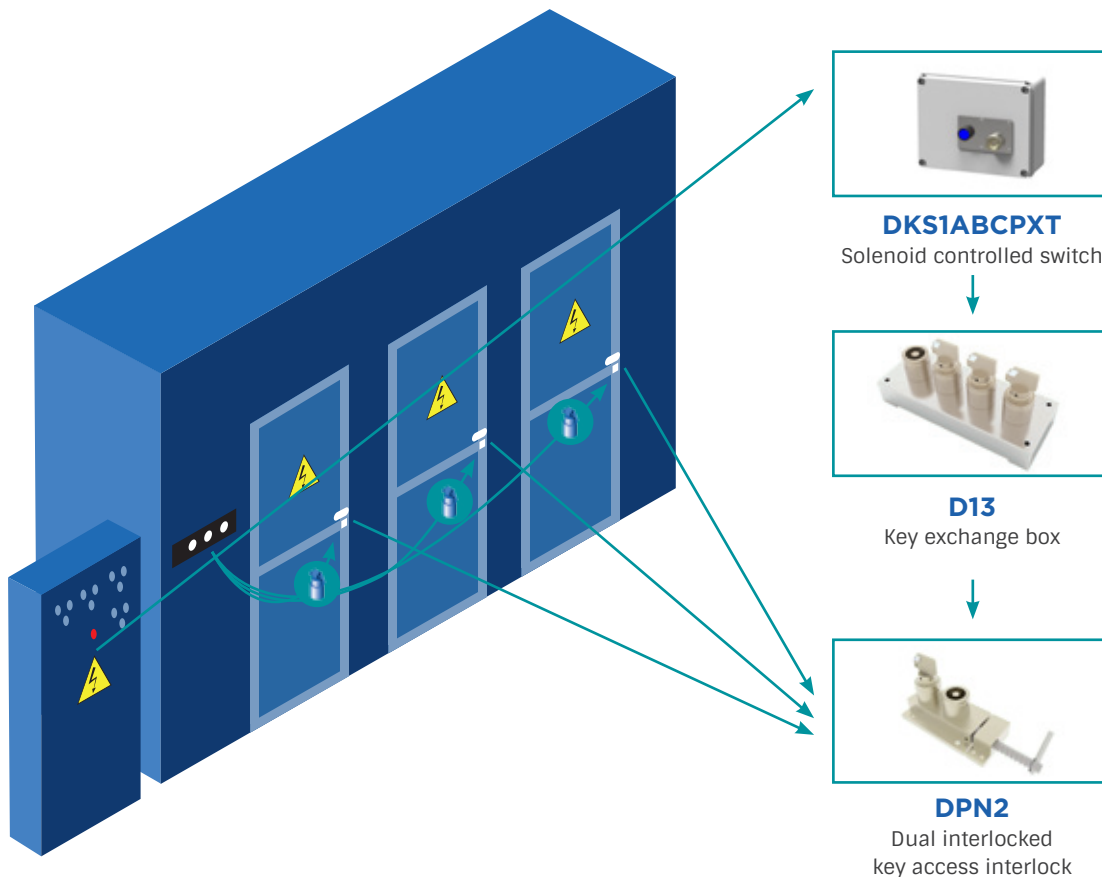


## APPLICATION DESCRIPTION

A typical application for the protection of machinery with one or more access points to the hazardous area involves the use of key distributors. The key distributor is used as part of a security system, which ensures the shut-down of a machine, before access to the hazardous area is allowed. The system includes a key switch for power supply and typically more than one door lock for complete operator access. The removal of the isolation key from the key switch isolates the power supply to the machine. This key is brought to the key distributor to release the trapped keys. The

released keys are used to access through the door interlocks. It is not possible to restart the machine until all the keys are inserted back into the key distributor in order to release the lock key and then remove the insulation.



# ENSURE THAT THERE ARE NO MORE POWER SUPPLIES TO THE BUS BARS IN THE ELECTRICAL CABINET

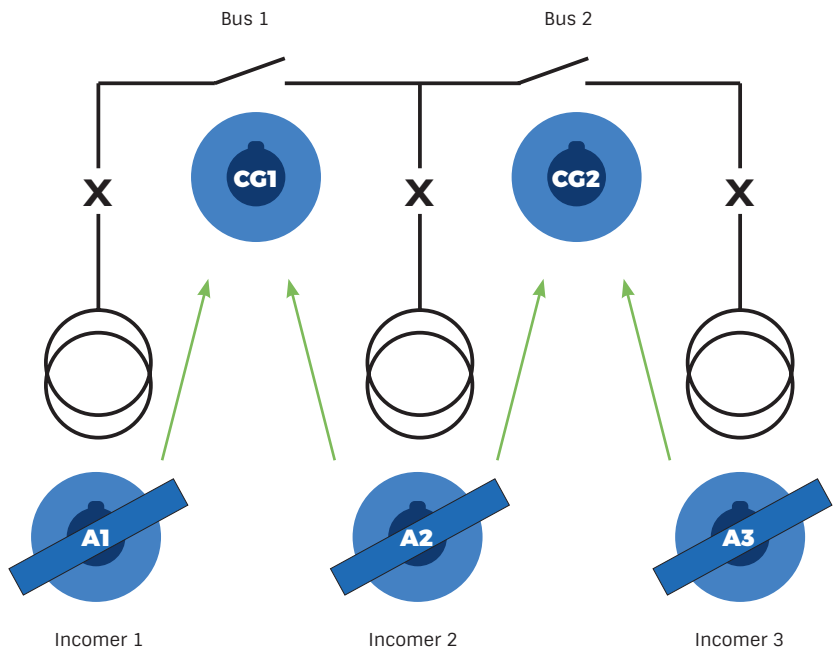

## APPLICATION DESCRIPTION

In the application shown in picture, key A1 will work for arrival 1, key A2 will work for arrival 2 and key A3 for arrival 3. key CG1 operates the bus tie 1, while key CG2 operates the bus tie 2. To an inserted key, the corresponding switch is closed.

The system shown is in position 1 (see table) and has closed arrivals and open junctions. To change the system to condition 2, key A1 is inserted into the distributor and the select- or knob is moved to condition 2. In this position, the key CG1 can be removed and busbar switch CG1 closed.

	A1	A2	A3	CG1	CG2
Pos 1	F	F	F	T	T
Pos 2	T	F	F	F	T
Pos 3	F	T	F	F	T
Pos 4	F	T	F	T	F
Pos 5	F	F	T	T	F

F= Free Key  
T= Trapped Key





# 03


## **ACCESS CONTROL** **APPLICATION EXAMPLES**





## ACCESS CONTROL

# MACHINERY PROTECTION WITH PARTIAL ACCESS TO THE RISK ZONE (VISIBLE OPERATOR)

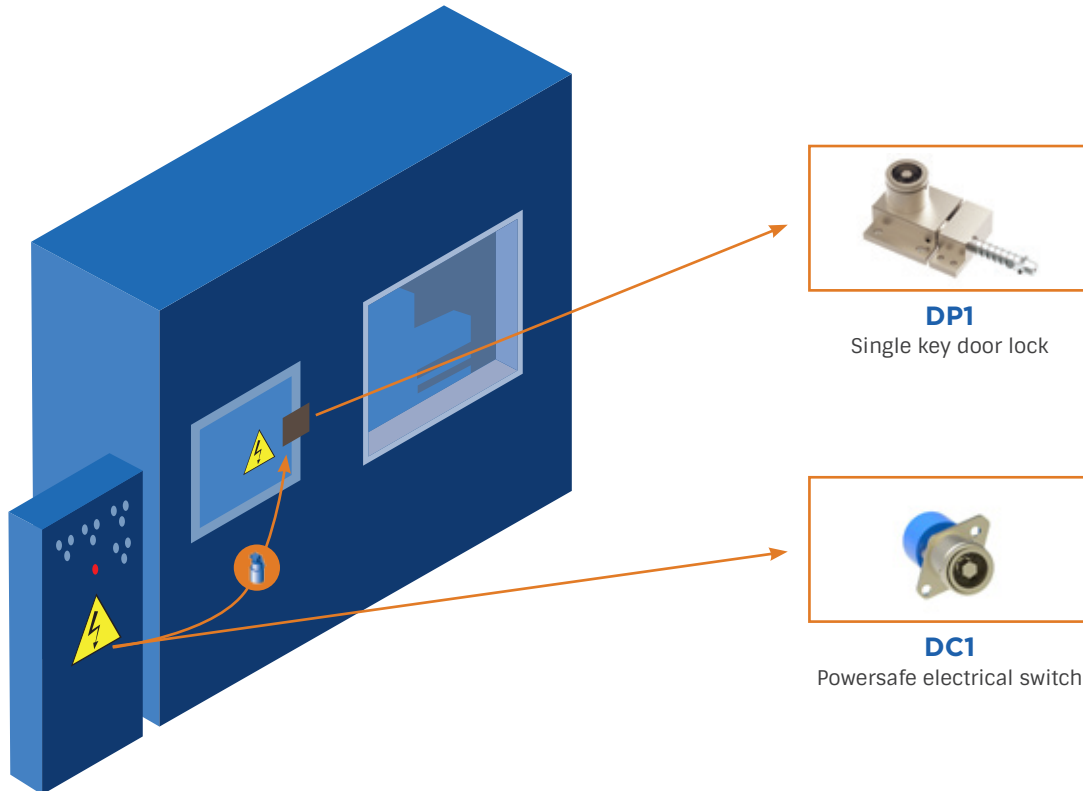

## APPLICATION DESCRIPTION

A typical application of the single key access interface is the protection of machinery with partial access to the risk zone; this means that the operator keep visible.

The system has a key switch that cuts the safety circuit of the machine when the key is removed. The key can then be inserted into the single-key door lock to enable access to the machine.


The machine can not be restarted until the door is completely closed and locked by the lock; only in this way will it be possible to recover the key to restart the machine via the safety switch.

## APPLICATION EXAMPLES

### ACCESS CONTROL

## FULL BODY ACCESS

# MACHINERY PROTECTION WITH FULL ACCESS TO THE HAZARDOUS ZONE (NOT VISIBLE OPERATOR)

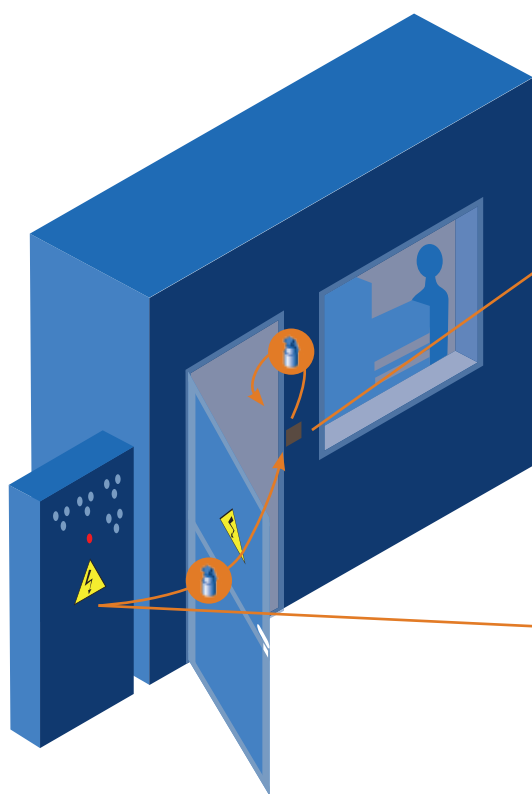

**DPN2**

Dual interlocked  
key access interlock



**QA1**

Key



**DKS1B2CPX**

Solenoid controlled switch


### APPLICATION DESCRIPTION

A typical application in the control activity of machinery with full body access, involves the use of the interlock with a double interlocked key for the protection of personnel from the possibility of access before the machinery is deactivated and subsequently that the operator may be inadvertently closed in the dangerous area. The dual-key access interlock is used as part of a security system, which ensures that a machine is stopped before access to the hazardous area. The system provides a key switch for power supply. Removing the isolation key from the key switch isolates the power supply to the ma-

chine. This key is transferred to the interlock with a double access key and inserted into the lock. This allows the door opening and the release of the personal key and slides the side bolt, which traps the isolation key. The personal key is then brought to the hazardous area by the operator to protect himself against accidental starting. The machine can not be restarted until the personal key is returned, the bolt is reinserted in the dual key interlock and the isolation key is removed and returned to the key switch.

## ACCESS CONTROL

# MAINTENANCE PROTECTION RAILWAY WITH FULL BODY ACCESS TO HAZARDOUS AREA (NOT VISIBLE OPERATOR)

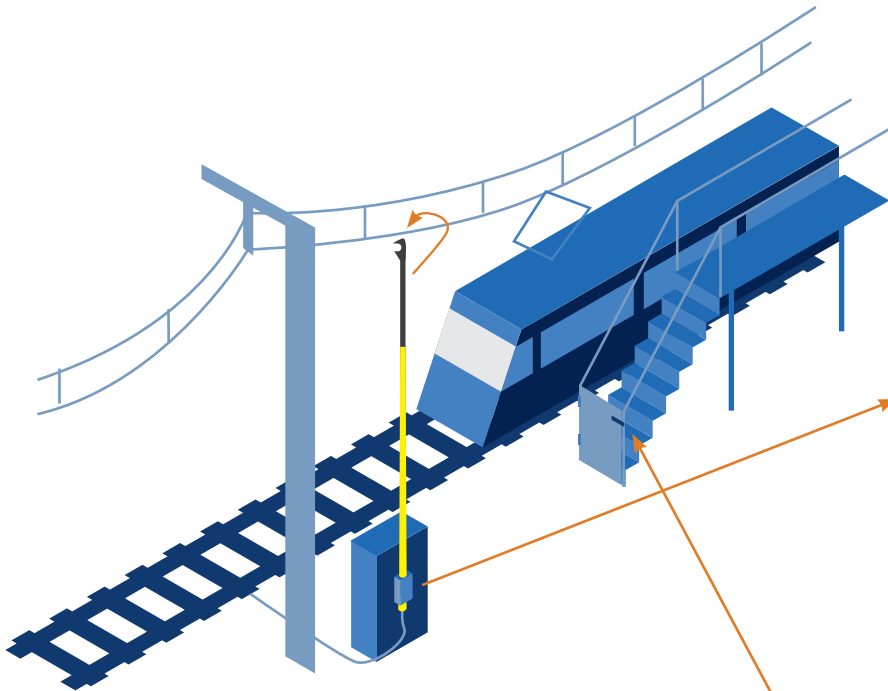

## APPLICATION DESCRIPTION

A typical application in railway maintenance activities, with full body access, provides the use of the interlock with a double access key for the protection of personnel from the possibility to access before the electric traction drive is deactivated and subsequently that the operator may be inadvertently closed in the risk zone. The interlock double key access is used as part of a security system, which guarantees arrest and grounding the electric drive first access to the hazardous area. The system has a key switch (often with 3 keys) for feeding electric traction. Removal of the isolation key from the switch cuts power electricity. This key is transferred in the interlock with a double key (block railway earthing maneuver - SecureBox) and inserted in the lock. This allows the release of the grounding insulating rod and of the opening key of the double-key access lock to the maintenance area and source of danger (e.g roof).

**QA1**

Key

**DBOX**

Railway grounding blocking device (Patented)

**QA1**

Key

**DPN2**


Dual interlocked key access interlock

This must be entered in the access lock, which releases the personal key and traps the key to isolation. The personal key comes then brought to the area dangerous by the operator to protect against accidental starting. Electric traction can not be restarted until it is returned the personal key, the bolt is reinserted into the double interlock key and the key to isolation is removed and reported in the SecureBox lock along with the insulating rod.



# 04

## **ISOLATION PRODUCTS**

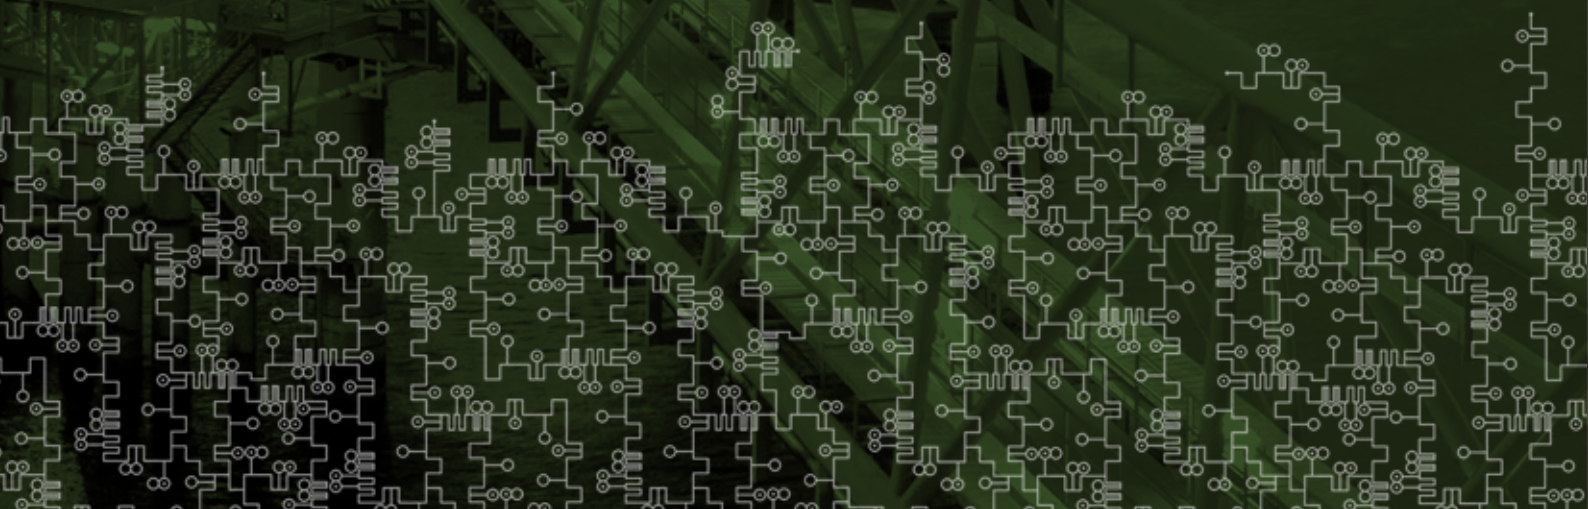


## ISOLATION

# DKSA/IP

## Switch disconnecter

**H190.01A32/DKSA1-3C/IP**

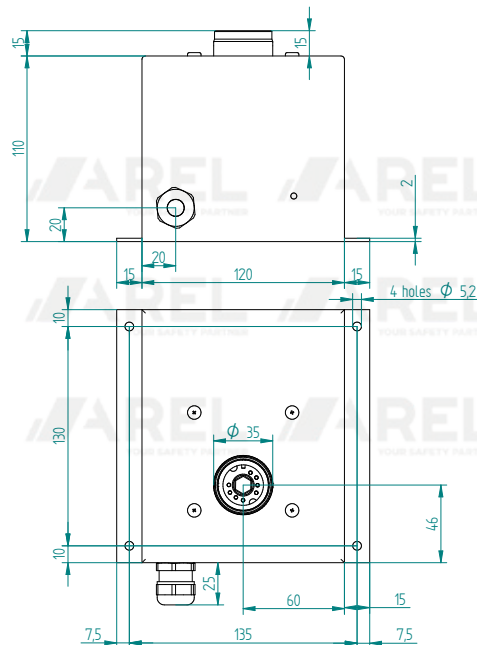

## PRODUCT FEATURES

- » Key switch for disconnectors. Used for current and motor isolation;
- » Complete with 6 main pole (NO) switch;
- » Material: chrome nickel brass;
- » Suitable for use in corrosive and non-corrosive environments;
- » Panel mounting;
- » Stainless steel housing;
- » Available with key series QA1;
- » 32A standard version.

### Standard

32A switch with 3-elements  
(6NO) to 2 positions (0-1)  
IP65 stainless steel box

## VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

With 1-element switch (2NO)

**H190.01A32/DKSA/IP**

With 2-component switch (4NO)

**H190.01A32/DKSA2C/IP**

With 63A switch

**H190.01A63/DKSA1-2C/IP**

With 125A switch

**H190.01A125/DKSA1-2C/IP**

You can request versions with one combination of these variations; for example:

With 1-element and 125A switch

**H190.01A125/DKSA/IP**


## ISOLATION

### DC

### Powersafe electrical switch

H180.01A20/DC1-2C

ISOLATION

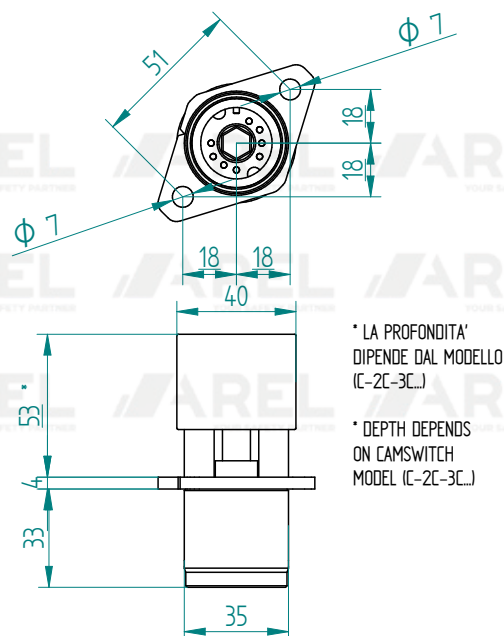

## PRODUCT FEATURES

- » Electric key switch;
- » Designed for machines control circuits;
- » Intended for the use of short-term insulation;
- » Available with key series QA1;
- » Material: chrome nickel brass;
- » Ideal for use in non-aggressive, corrosive and heavy-duty environments;
- » To be mounted on panel or back panel;
- » Available with standard 20 A and 25 A on request.

### Standard

20A switch with 2-elements (4NO)  
at 2 positions (0-1)

## VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

With 1-element switch (2NO)

**H180.01A20/DC1**

With 3-component switch (6NO)

**H180.01A20/DC1-3C**

With 25A switch

**H180.01A25/DC1-2C**

In Junction box

**H185.01A20/DCA1-2C**

Boxed in IP65 metal box

**H190.01A20/DCA1-2C/IP**

You can request versions with one combination of these variations; for example:

With 3-elements and 25A


**H180.01A25/DC1-3C**

## ISOLATION

### DBOX

#### Railway grounding blocking device (Patented)

##### H68.DBOX12

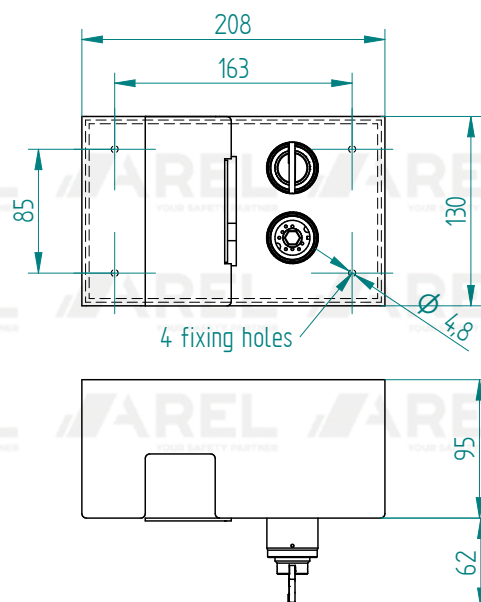

### PRODUCT FEATURES

- » Secure box is a patented, innovative product safety device for maintenance works on rail traction power lines and specific on power lines railways inside maintenance workshop;
- » Interlock with 2 keys for interconnection between the ground blade selector and the insulating rod and interconnection between the insulating rod and the Key Exchange Boxes;
- » Staff to the shelter of the foil in rest position;
- » Toll for pole attachment of interlocking device;
- » Bracket and ring for flag fixing.

#### Standard


Box in epoxy painted yellow stell  
Brass cylinders



## ISOLATION

### DKS-B Solenoid controlled switch

H185.02A20/DKS11B2CPX

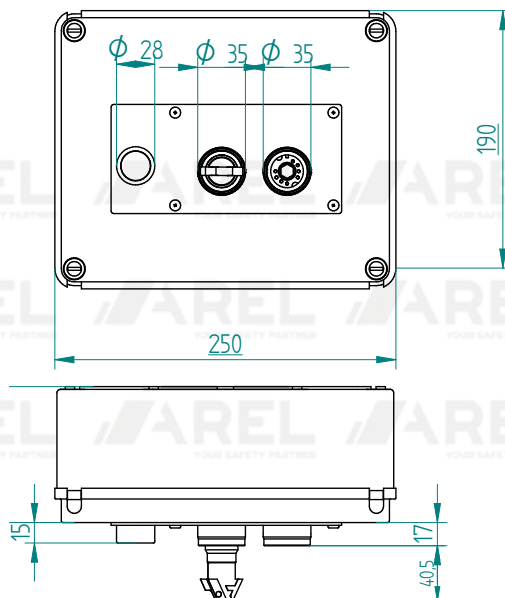

### PRODUCT FEATURES

- » Heavy-duty solenoid controlled key switch interlock;
- » Intended to be used for controlled isolation or low current switching;
- » Used when a process can send a signal to release a key, e. g. a robot must end a cycle before isolation;
- » It should be used for short-term insulation, out of load;
- » Available with key series QA1;
- » Mounting in an existing panel or for surface mounting;
- » Housing in junction box with IP65 degree of protection (surface mounted version);
- » Material: chrome nickel brass;
- » Suitable for use in standard or corrosive environments;
- » Available voltages: 24, 48, 110 and 230 Vac or Vdc.

#### Standard

20A switch with 2-elements (4NO) and 2 positions (0-1)  
One solenoid (B)  
A blue light button-NO contact (PX)  
Solenoid voltage: 110Vdc

### VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

With 1-element switch (2NO)

**H185.02A20/DKS11BPX**

With 3-component switch (6NO)

**H185.02A20/DKS11B3CPX**

Without button

**H185.02A20/DKS11B2C**

With key lock on insertion

**H185.02A20/DKS11B2CPX/I**

With key lock in both positions

**H185.02A20/DKS11B2CPX/IE**

With non-luminous button

**H185.02A20/DKS11B2CP**

With 25A switch

**H185.02A25/DKS11B2CPX**

With two contacts on the button (2NO)

**H185.02A20/DKS11B2CPXD**

Without polyester junction box

**H180.02A20/DKS11B2CPX**

Boxed in IP65 stainless steel box

**H190.02A20/DKS11B2CPX/IP**

Other available voltages: 24-48-230Vac / 24-48Vdc

You can request versions with one combination of these variations; for example:

With 3-elements and push-button (no light)


**H185.02A20/SKS11B-3CP**

## ISOLATION

# DKS-B

## Solenoid controlled switch

**H180.01A20/DKS1B2CPX**

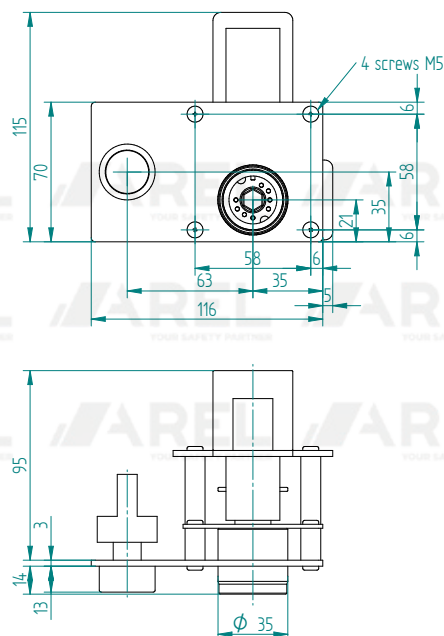

## PRODUCT FEATURES

- » Heavy-duty solenoid controlled key switch interlock;
- » Mainly used in UPS systems (Uninterruptable power supply);
- » Ensures that access can only be acquired when the UPS is in safe condition;
- » Material: chrome nickel brass;
- » Ideal for use in corrosive and non-corrosive environments;
- » Supplied ready for backpanel mounting;
- » Available voltages: 24, 48, 110 and 230 Vac or Vdc;
- » Available with key series QA1.

### Standard

20A switch with 2-elements (4NO) and 2 positions (0-1)  
One solenoid (B)  
A blue light button to a NO contact (PX)  
Solenoid voltage: 110Vdc

## VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

With 1-element switch (2NO)

**H180.01A20/DKS1BCPX**

With 3-component switch (6NO)

**H180.01A20/DKS1B3CPX**

Without button

**H180.01A20/DKS1B2C**

With key lock on insertion

**H180.01A20/DKS1B2CPX/I**

With key lock in both positions

**H180.01A20/DKS1B2CPX/IE**

With non-luminous button

**H180.01A20/DKS1B2CP**

With 25A switch

**H180.01A25/DKS1B2CPX**

With two contacts on the button (2NO)

**H180.01A20/DKS1B2CPXd**

Boxed in junction box

**H185.01A20/DKSA1B2CPX**

Boxed in IP65 metal box

**H190.01A20/DKSA1B2CPX/IP**

Other available voltages: 24-48-230Vac / 24-48Vdc

You can request versions with one combination of these variations; for example:


With 3-elements and push-button (no light)

**H180.01A20/SKS1B-3CP**

## ISOLATION

### DB Bolt lock

H55.DB11

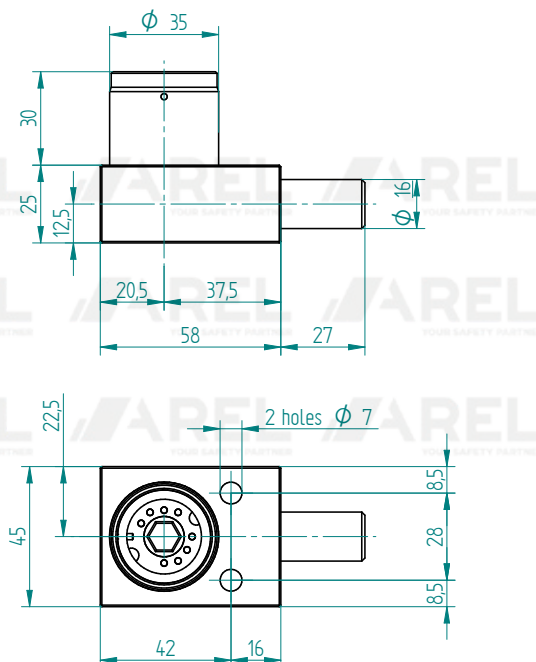

### PRODUCT FEATURES

- » Key mechanical interlocking;
- » Designed for the control of electrical panels, valves and operations in general;
- » Comes with a 15.92mm (16-) diameter; bolt available in various lengths;
- » Material: chrome nickel brass;
- » Ideal for use in corrosive, non-corrosive or aggressive environments;
- » Bolt cutting force: 30KN (stainless steel) and 19KN (brass).

#### Standard

Bolt stroke 19.5mm  
Diameter of the bolt 16mm  
Brass

### VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

With bolt that flush with the lock

**H55.DB11/020**

With bolt with minimum protrusion 23mm

**H55.DB11/2343**

With bolt with minimum protrusion "x" mm

**H55.DB11/xy**

With nickel-chromium treatment

**HC55.DB11**

With body in stainless steel sheet

**H58.DB11X**

You can request versions with one combination of these variations; for example:


With nickel-chromium treatment and bolt flush with lock

**HC55.DB11/020**

## ISOLATION

### DB Dual key bolt

**H55.DBmK12**

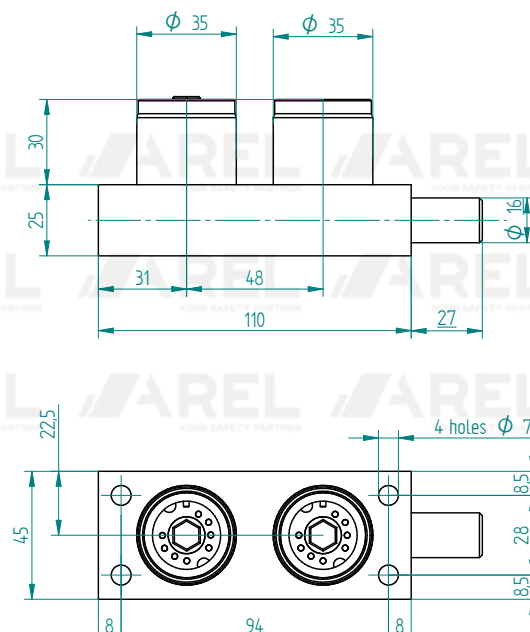

### PRODUCT FEATURES

- » The double-key locking lock is a key-operated mechanical interlock;
- » Designed for the control of electrical panels, valves and operations in general;
- » Comes with a 12mm diameter bolt available in various lengths;
- » Available with key series QA1;
- » Material: chrome nickel brass;
- » Ideal for use in corrosive, non-corrosive or aggressive environments;
- » Version with double control key.

### Standard

Bolt stroke 19.5mm  
Diameter of the bolt 16mm  
Brass

### VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

With bolt that flush with the lock

**H55.DBmK12/O20**

With bolt with minimum protrusion 23mm

**H55.DBmK1/2343**

With bolt with minimum protrusion "x" mm

**H55.DBmK12/xy**

With nickel-chromium treatment

**HC55.DBmK12**

With body in stainless steel sheet

**H58.DBmK12X**

You can request versions with one combination of these variations; for example:

With nickel-chromium treatment and bolt flush with lock

**HC55.DBmK12/O20**




## ISOLATION

### DB

### Dual key bolt interlock

#### H55.DB12

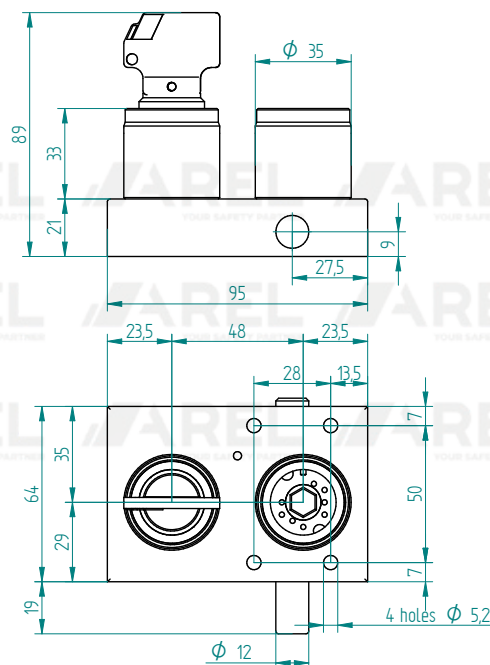

## PRODUCT FEATURES

- » The double-key locking lock is a key-operated mechanical interlock:
- » Designed for the control of electrical panels, valves and operations in general;
- » Comes with a 12mm diameter bolt available in various lengths;
- » Available with key series QA1;
- » Material: chrome nickel brass;
- » Ideal for use in corrosive, non-corrosive or aggressive environments;
- » Version with interlocked keys.

### Standard

Bolt stroke 13mm  
Diameter of the bolt 12mm  
Brass cylinder  
Stainless steel body

## VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

With bolt with minimum protrusion "x" mm

**H55.DB12/xy**

With nickel-chromium treatment

**HC55.DB12**

You can request versions with one combination of these variations; for example:

With nickel-chromium treatment and bolt a variable length


**HC55.DB12/xy**

## ISOLATION

### DB

### Dual key bolt

#### H55.DBK12

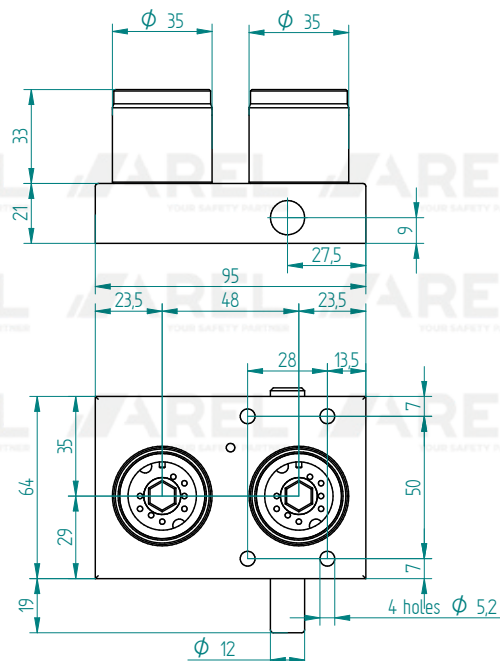

## PRODUCT FEATURES

- » The double-key locking lock is a key-operated mechanical interlock;
- » Designed for the control of electrical panels, valves and operations in general;
- » Comes with a 12mm diameter bolt available in various lengths;
- » Available with key series QA1;
- » Material: chrome nickel brass;
- » Ideal for use in corrosive, non-corrosive or aggressive environments.

### Standard

Bolt stroke 13mm  
Diameter of the bolt 12mm  
Brass cylinder  
Stainless steel body

## VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

With bolt with minimum protrusion "x" mm

**H55.DBK12/xy**

With nickel-chromium treatment

**HC55.DBK12**

You can request versions with one combination of these variations; for example:

With nickel-chromium treatment and bolt a variable length


**HC55.DBK12/Lx**

## ISOLATION

### DBC

#### Bolt interlock with safety switch

##### H56.DBC11

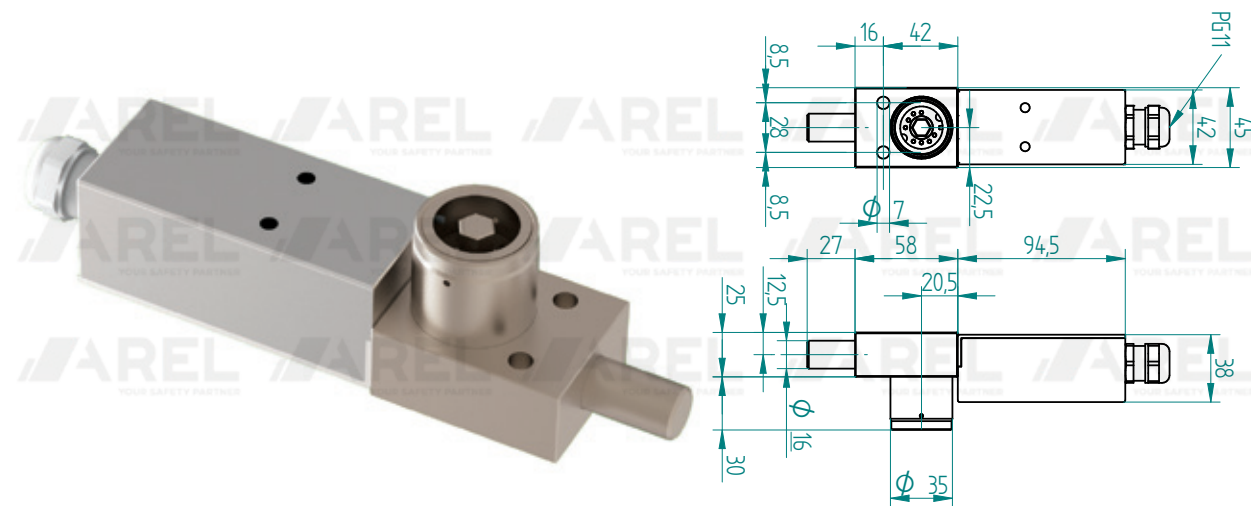

## PRODUCT FEATURES

- » Key mechanical interlock;
- » Complete with monitoring and signaling electrical contacts;
- » Designed for controlling electrical panels or valves;
- » Comes with a 16mm diameter bolt available in various lengths;
- » It is supplied with NO + NC contacts; IP67 degree of protection;
- » Available with key series QA1;
- » Material: chrome nickel brass;
- » Ideal for use in corrosive, non-corrosive or aggressive environments;
- » Bolt cutting force: 30KN (stainless steel) and 19KN (brass).

### Standard

Bolt stroke 19.5mm  
Diameter of the bolt 16-mm  
Brass  
NO-NC limit switch contacts  
Contact box in stainless steel

## VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

With bolt that flush with the lock

**H56.DBC11/020**

With bolt with minimum protrusion 23mm

**H56.DBC11/2343**

With bolt with minimum protrusion "x" mm

**H56.DBC11/xy**

With nickel-chromium treatment

**HC56.DBC11**

With body in stainless steel sheet

**H58.DBC11X**

You can request versions with one combination of these variations; for example:

With nickel-chromium treatment and bolt flush with lock


**H56.DBC11/020**

## ISOLATION

### DBB

#### Solenoid controlled bolt lock with safety switch

##### H56.DB11BCPX

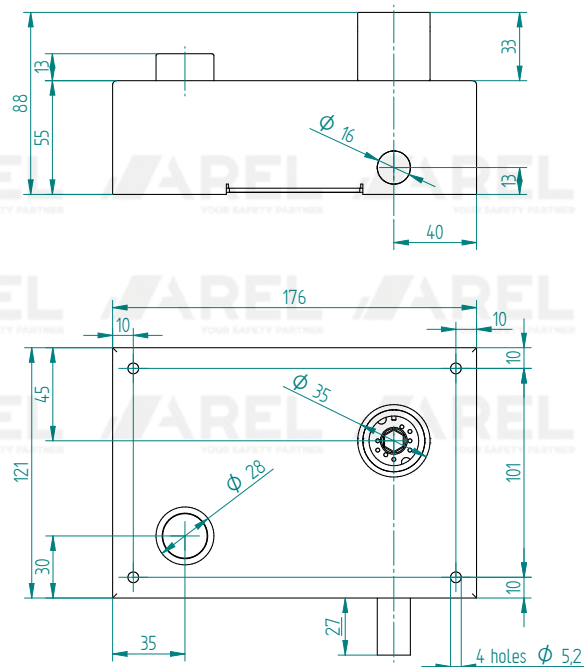

### PRODUCT FEATURES

- » Complete with electrical monitoring and signaling contacts;
- » Designed for controlling electrical panels or valves;
- » Comes with a 16mm diameter bolt available in various lengths;
- » It is supplied with NO + NC contacts; IP67 degree of protection;
- » Available with key series QA1;
- » Ideal for use in corrosive, non-corrosive or aggressive environments;
- » Bolt cutting force: 30KN (stainless steel).

#### Standard

Bolt stroke 19.5mm  
Diameter of the bolt (stainless) 16-mm  
Brass Cylinder  
NO-NC limit switch contacts  
Stainless steel box

### VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

With 2 signal contacts (2NO-2NC)

**H56.DB11B2CPX**

With non-luminous button

**H56.DB11BCP**

With two contacts on the button (2NO)

**H56.DB11BCPXd**

With nickel-chromium treatment

**HC56.DB11BCPX**

You can request versions with one combination of these variations; for example:

With 2 signal contacts (2NO-2NC) and not luminous button


**H56.DB11B2CP**



## MC

### Switchgear interlock

H50.MC3533

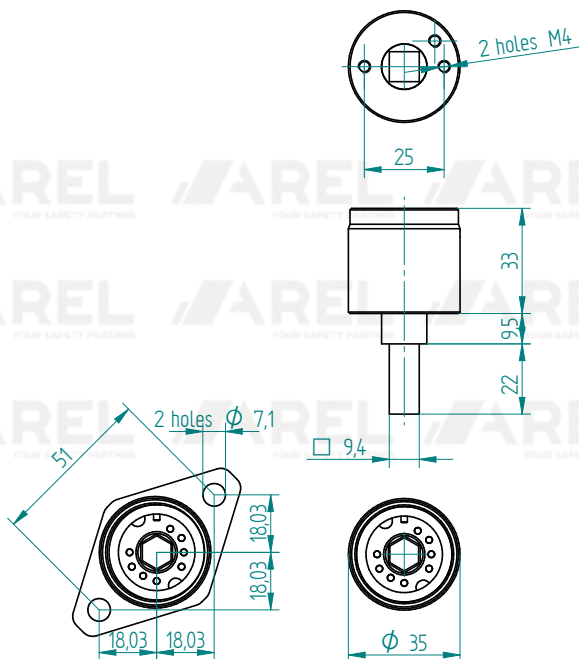

### PRODUCT FEATURES

- » Switchgear interlock;
- » Designed for use as a mechanical interlock for electrical panels through a mechanical connection to the isolation lever/maneuver;
- » Equipped with a squared 9.5mm and 22mm long pin that can be used to drive an insulator;
- » The movement of the shaft work on the operation control system;
- » Material: chrome nickel brass;
- » Ideal for use in corrosive, non-corrosive or aggressive environments;
- » Clockwise rotation direction (to insert the key).

#### Standard

Brass

### VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

Front panel mounting

**H50.MC2328mPA**

With nickel-chromium treatment

**HC50.MC3533**

## ISOLATION

### MC Switchgear interlock

**H50.MC2328m**



### PRODUCT FEATURES

- » MINI LOCK - Switchgear interlock;
- » Designed for use as a mechanical interlock for electrical panels through a mechanical connection to the isolation lever/maneuver;
- » The movement of the shaft work on the operation control system;
- » Material: chrome nickel brass;
- » Ideal for use in corrosive, non-corrosive or aggressive environments;
- » Mini lock.

Standard

Brass

### VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:


Front panel mounting  
**H50.MC2328mPA**

## ISOLATION

### SKS

#### Electric key switch

V180.01A20/SKS1-2C

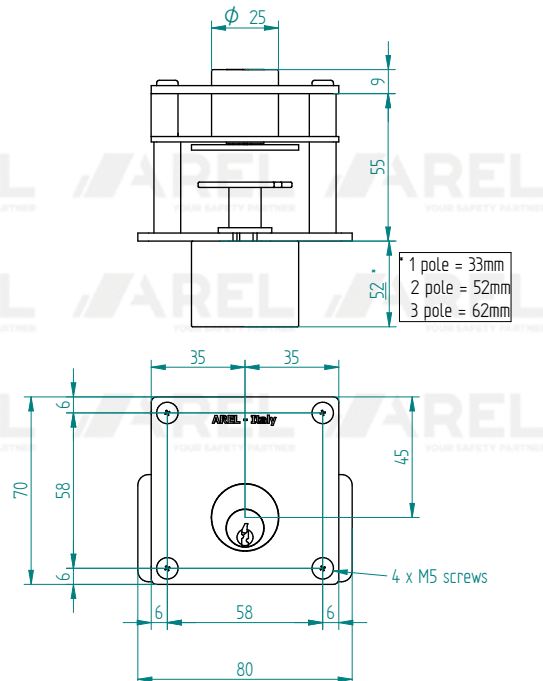

## PRODUCT FEATURES

- » Key-operated electric switch;
- » Designed for machines control circuits;
- » Intended for the use of short-term insulation;
- » Available with key series QL1;
- » Material: brass and stainless steel;
- » Ideal for use in non-aggressive environments and corrosive;
- » Supplied ready for backpanel assembly;
- » IP65 protection (version with mounting a panel);
- » Available with 20 A standard and 25 A on request.

### Standard

20A switch with 2-elements (4NO) and 2 positions (0-1)

## VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

With 1-element switch (2NO)

**V180.01A20/SKS1**

With 3-component switch (6NO)

**V180.01A20/SKS1-3C**

With 25A switch

**V180.01A25/SKS1-2C**

Boxed in junction box

You can request versions with one combination of these variations; for example:

With 3-elements and 25A


**V180.01A25/SKS1-3C**

## ISOLATION

## SKSB

## Key switch controlled by solenoid

V180.01A20/SKS1B2CPX

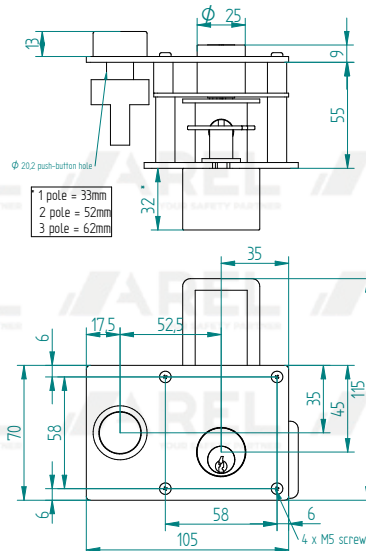

## Standard

20A switch with 2-elements (2NO-2NC) and 2 positions (0-1)  
 A key extraction block electromagnet (B)  
 A blue light button to a NO contact (PX)  
 Electromagnet voltage: 110Vdc

## PRODUCT FEATURES

- » Interlock with locked key controlled by solenoid;
- » Mainly used in UPS systems (Uninterruptable power supply);
- » Ensures that access can be acquired only when the UPS is in a condition of safety;
- » Material: brass and stainless steel;
- » Ideal for use in corrosive and non-corrosive environments corrosive;
- » Supplied ready for backpanel assembly;
- » Available voltages: 24, 48, 110 and 230 Vac or Vdc;
- » Available with key series QL1.

## VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

Without button

**V180.01A20/SKS1B2C**

With 1-element switch (2NO)

**V180.01A20/SKS1BCPX**

With 3-component switch (6NO)

**V180.01A20/SKS1B3CPX**

With key lock on insertion

**V180.01A20 SKS1B2CPX / I**

With key lock in both positions

**V180.01A20/SKS1B2CPX / IE**

With non-luminous button

**V180.01A20/SKS1B2CP**

With 25A switch

**V180.01A25/SKS1B2CPX**

With two contacts on the button (2NO)

**V180.01A20/SKS1B2CPXd**

Boxed in junction box

**V185.01A20/SKSA1B2CPX**

Boxed in IP65 metal box

**V190.01A20/SKSA1B2CPX**

Other available voltages: 24-48-230Vac / 24-48Vdc

You can request versions with one combination of these variations; for example:

With 3-elements and non-luminous button  
**V180.01A20/SKS1B-3CP**





## ISOLATION

### SBOX

#### Railway grounding blocking device (patented)

V68.SBOX12

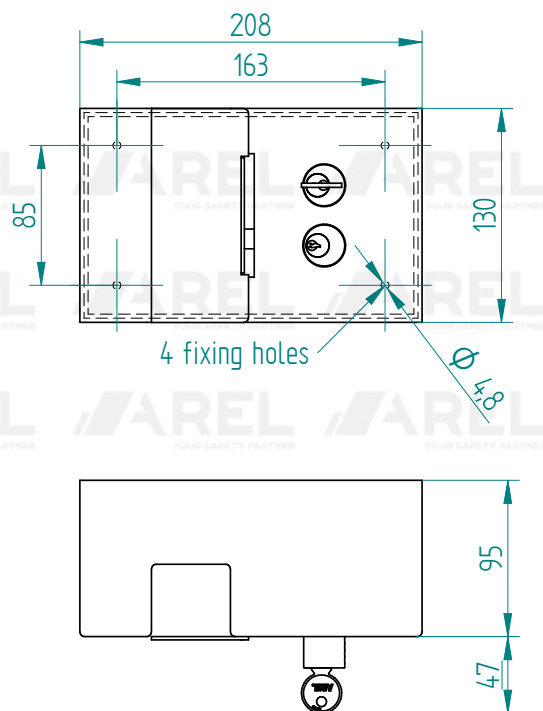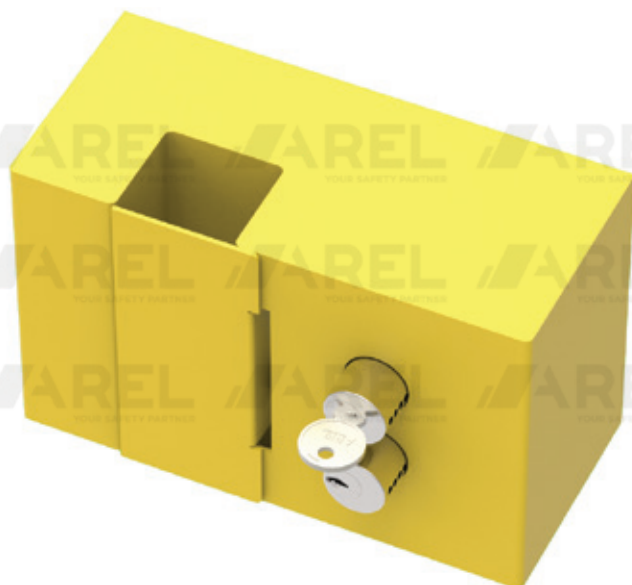

#### PRODUCT FEATURES

- » Secure box is a patented, innovative product safety device for maintenance works on rail traction power lines and specific on power lines railways inside maintenance workshop;
- » Interlock with 2 keys for interconnection between the ground blade selector and the insulating rod and interconnection between the insulating rod and the Key Exchange Boxes;
- » Staff to the shelter of the foil in rest position;
- » Toll for pole attachment of interlocking device;
- » Bracket and ring for flag fixing.

#### Standard



Box in epoxy painted yellow stell  
Chromed Brass cylinders

## ISOLATION

# SB

## Bolt lock

V55.SB11

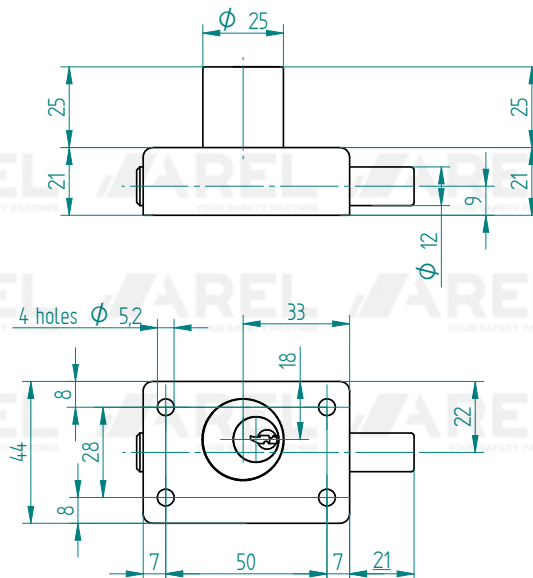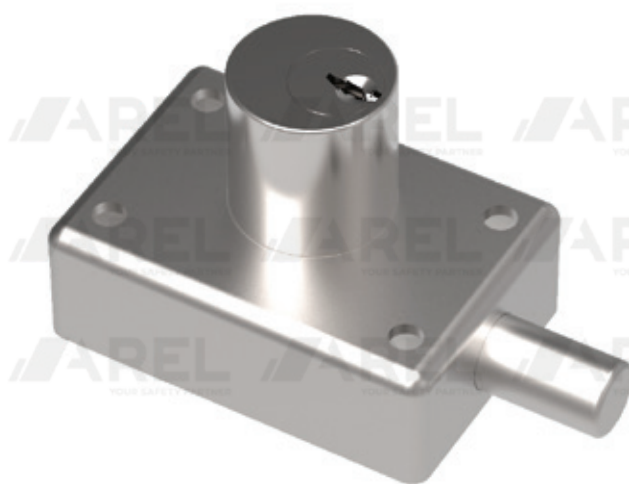

### PRODUCT FEATURES

- » The Bolt locks are used to control the operations of sectioning, engaging or disengaging the command organs;
- » Designed for controlling electrical panels, valves and leverages in general;
- » Comes with a diameter bolt 12mm available in various lengths;
- » Available with QL1 series key;
- » Material: chromed brass and stainless steel;
- » Ideal for use in corrosive, not corrosive or aggressive environments;
- » Cutting force of the bolt: 25KN.

#### Standard

Bolt stroke 15mm  
Diameter of the bolt 12mm  
Cylinder height 25mm

### VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

- With 20mm stroke  
**V55.SB11/CS.A20**
- With 10mm diameter bolt  
**V55.SB11/D10**
- With 6mm diameter bolt  
**V55.SB11/D6-L21**
- With bolt variable length up to  
**V55.SB11/Lx**
- With 61mm high cylinder  
**V55.SBL11**
- With 75mm high cylinder  
**V55.SBXL11**
- With inverse function (key removed – bolt in)  
**V55.SBN11**

You can request versions with one combination of these variations; for example:


- With 20mm stroke and 61mm high cylinder  
**V55.SBL11/CS.A20**

## ISOLATION

### SB

#### Bolt lock interlocked double key

V55.SB12

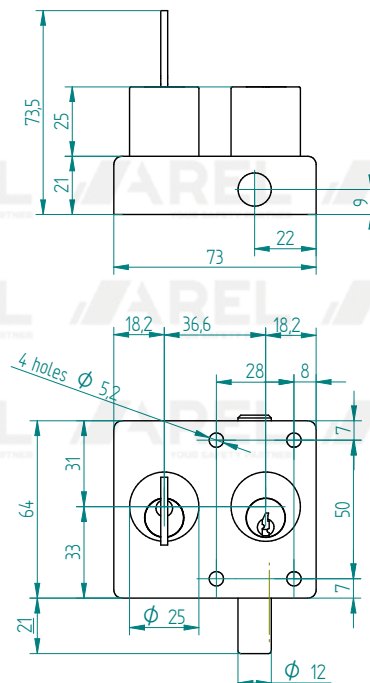

### PRODUCT FEATURES

- » The bolt locks are used to control the operations of sectioning, engaging or disengaging the command organs;
- » Designed for controlling electrical panels, valves and leverages in general;
- » Comes with a diameter bolt 12mm available in various lengths;
- » Available with QL1 series key;
- » Material: chromed brass and stainless steel;
- » Ideal for use in corrosive, not corrosive or aggressive environments;
- » Cutting force of the bolt: 25KN.

#### Standard

Bolt stroke 15mm  
Diameter of the bolt 12mm  
Cylinder height 25mm

### VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

- With 20mm stroke  
**V55.SB12/CS.A20**
- With 10mm diameter bolt  
**V55.SB12/D10**
- With 6mm diameter bolt  
**V55.SB12/D6-L21**
- With bolt variable length up to  
**V55.SB12/Lx**
- With 61mm high cylinder  
**V55.SBL12**
- With 75mm high cylinder  
**V55.SBXL12**
- With IP67 boxed rear limit switch  
**V56.SBCS12/67**
- With side limit switch (DX or SX)  
**V56.SBCF12/SX**

You can request versions with one combination of these variations; for example:


- With 20mm stroke and 61mm high cylinder  
**V55.SBL12/CS.A20**

## ISOLATION

## SB

## Bolt lock double key

V55.SBK12

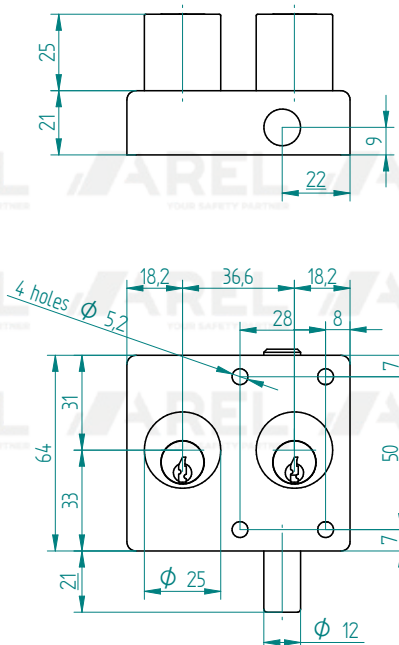

## PRODUCT FEATURES

- » The bolt locks are used to control the operations of sectioning, engaging or disengaging the command organs;
- » Designed for controlling electrical panels, valves and leverages in general;
- » Comes with a diameter bolt 12mm available in various lengths;
- » Available with QL1 series key;
- » Material: chromed brass and stainless steel;
- » Ideal for use in corrosive, not corrosive or aggressive environments;
- » Cutting force of the bolt: 25KN.

## Standard

Bolt stroke 15mm  
Diameter of the bolt 12mm  
Cylinder height 25mm

## VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

- With 20mm stroke  
**V55.SBK12/CS.A20**
- With 10mm diameter bolt  
**V55.SBK12/D10**
- With 6mm diameter bolt  
**V55.SBK12/D6-L21**
- With bolt variable length up to  
**V55.SBK12/Lx**
- With 61mm high cylinder  
**V55.SBK12**
- With 75mm high cylinder  
**V55.SBKXL12**
- With IP67 boxed rear limit switch  
**V56.SBCSK12/67**
- With side limit switch (DX or SX)  
**V56.SBCFK12/SX**

You can request versions with one combination of these variations; for example:

- With 20mm stroke and 61mm high cylinder  
**V55.SBK12/CS.A20**





## ISOLATION

### SB

### Bolt lock interlocked triple key

#### V55.SB13

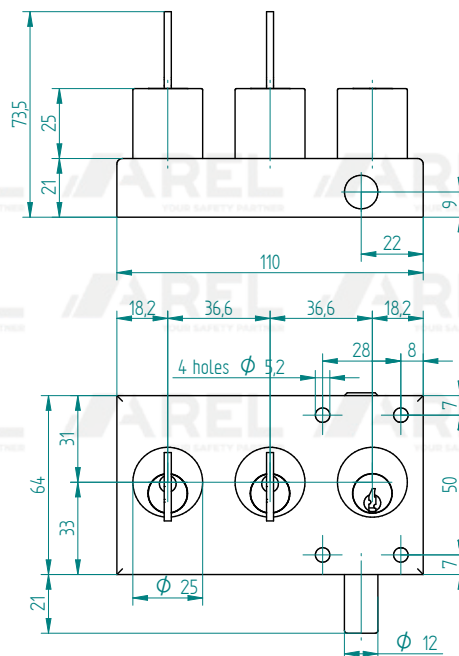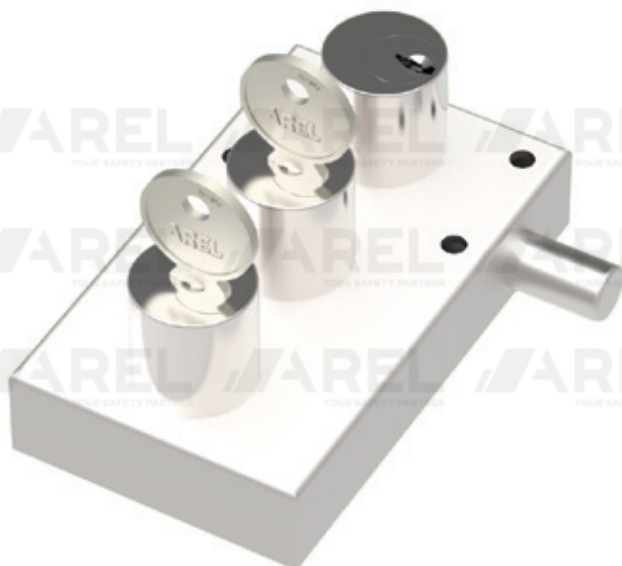

## PRODUCT FEATURES

- » The bolt locks are used to control the operations of sectioning, engaging or disengaging the command organs;
- » Designed for controlling electrical panels, valves and leverages in general;
- » Comes with a diameter bolt 12mm available in various lengths;
- » Available with QL1 series key;
- » Material: chromed brass and stainless steel;
- » Ideal for use in corrosive, not corrosive or aggressive environments;
- » Cutting force of the bolt: 25KN.

### Standard

- Bolt stroke 15mm
- Diameter of the bolt 12mm
- Cylinder height 25mm

## VARIANTS


Variants, compared to standard model shown in this page, differ by conditions indicated below:

- With 20mm stroke  
**V55.SB13/CS.A20**
- With 10mm diameter bolt  
**V55.SB13/D10**
- With 6mm diameter bolt  
**V55.SB13/D6-L21**
- With bolt variable length up to  
**V55.SB13/Lx**
- With 61mm high cylinder  
**V55.SBL13**
- With 75mm high cylinder  
**V55.SBXL13**

You can request versions with one combination of these variations; for example:

- With 20mm stroke and 61mm high cylinder  
**V55.SBL13/CS.A20**

## ISOLATION

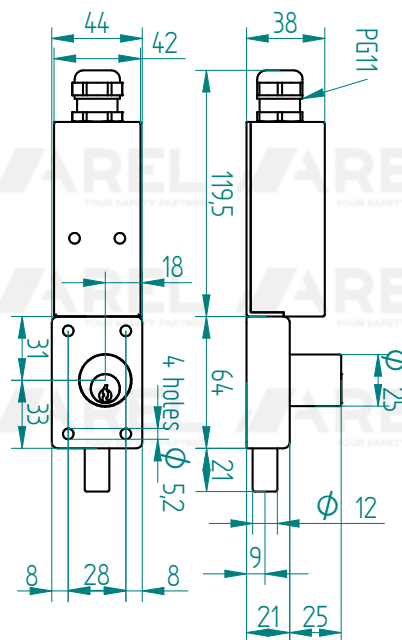**SBC****Bolt lock with safety switch****V56.SBC11/67****PRODUCT FEATURES**

- » The bolt locks are used to control the operations of sectioning, engaging or disengaging the command organs;
- » Complete with electrical signaling and monitoring contacts;
- » Designed for controlling electrical panels or valves;
- » Comes with a diameter bolt 12mm available in various lengths;
- » It is supplied with NO + NC contacts with degree of protection IP67;
- » Available with QL1 series key;
- » Material: chromed brass and stainless steel;
- » Ideal for use in corrosive, not corrosive or aggressive environments;
- » Cutting force of the bolt: 25KN.

**Standard**

Bolt stroke 15mm  
 Diameter of the bolt 12mm  
 Cylinder height 25mm  
 NO-NC limit switch contacts

**VARIANTS**

Variants, compared to standard model shown in this page, differ by conditions indicated below:

- With 20mm stroke  
**V56.SBC11/CS.A20**
- With 10mm diameter bolt  
**V56.SBC11/D10**
- With 6mm diameter bolt  
**V56.SBC11/D6-L21**
- With bolt variable length up to  
**V56.SBC11/Lx**
- With 61mm high cylinder  
**V56.SBCL11**
- With 75mm high cylinder  
**V56.SBCXL11**
- With inverse function (key removed - bolt in)  
**V56.SBCN11**

You can request versions with one combination of these variations; for example:


- With 20mm stroke and 61mm high cylinder  
**V56.SBCL11/CS.A20**

## ISOLATION

### SBB

#### Solenoid controlled bolt lock with safety switch

V56.SBCF11BPX

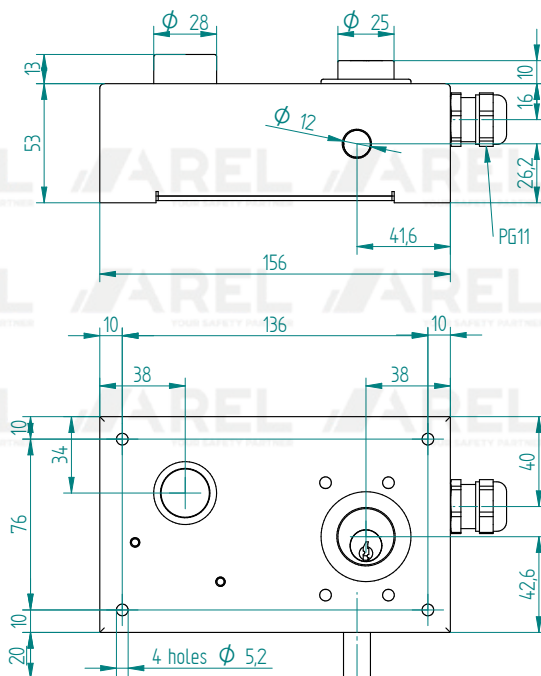

### PRODUCT FEATURES

- » The bolt locks are used to control the operations of sectioning, engaging or disengaging the command organs;
- » Complete with electrical monitoring and signaling contacts;
- » Designed for controlling electrical panels or valves;
- » Comes with a diameter bolt 12mm available in various lengths;
- » It is supplied with NO + NC contacts;
- » Available with QL1 series key;
- » Materiale: ottone e acciaio inossidabile;
- » Material: chromed brass and stainless steel;
- » Available voltages: 24, 48, 110 and 230 Vac or Vdc;
- » Cutting force of the bolt: 25KN;
- » Ideal for use in corrosive, not corrosive or aggressive environments.

#### Standard

Bolt stroke 15mm  
Diameter of the bolt 12mm  
Cylinder height 10mm  
Limit switch contact with common

### VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

With 20mm stroke

**V56.SBCF11BPX/CS.A20**

With 10mm diameter bolt

**V56.SBCF11BPX/D10**

With 6mm diameter bolt

**V56.SBCF11BPX/D6-L21**

With bolt variable length up to

**V56.SBCF11BPX/Lx**

Without luminous button



**V56.SBCF11BP**

You can request versions with one combination of these variations; for example:

With 20mm stroke and non-luminous button

**V56.SBCF11BP/CS.A20**

## ISOLATION

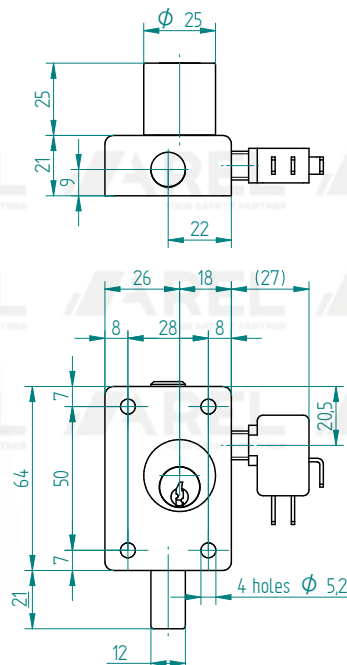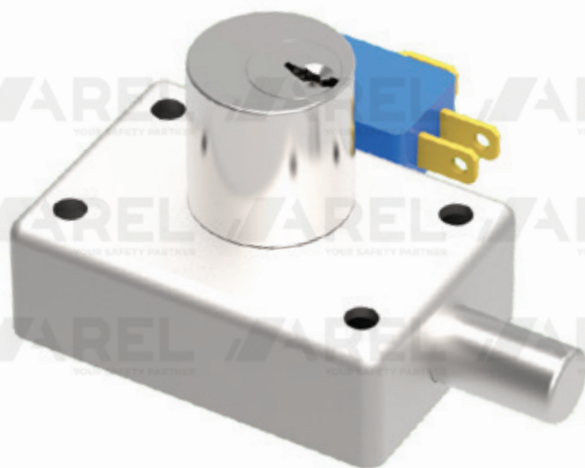**SBC****Bolt lock with safety switch****V56.SBCF11/DX****PRODUCT FEATURES**

- » The bolt locks are used to check the cutting operations, engaging or disengaging the organs of command. It differs from the standard model for the presence of a limit switch able to add a signaling and control function to the operation;
- » Designed for control of electrical panels or valves;
- » Comes with a diameter bolt 12mm available in various lengths;
- » Supplied with NO + NC contacts (common line);
- » Available with QL1 series key;
- » Material: chromed brass and stainless steel;
- » Ideal for use in corrosive, non-corrosive or aggressive environments;
- » Cutting force of the bolt: 25KN.

**Standard**

Bolt stroke 15mm  
 Diameter of the bolt 12mm  
 Cylinder height 25mm  
 Limit switch contact with common, on the right

**VARIANTS**

Variants, compared to standard model shown in this page, differ by conditions indicated below:

- With 20mm stroke  
**V56.SBCF11/DX/CS.A20**
- With 10mm diameter bolt  
**V56.SBCF11/DX/D10**
- With 6mm diameter bolt  
**V56.SBCF11/DX/D6-L21**
- With bolt variable length up to  
**V56.SBCF11/DX/LX**
- With 61mm high cylinder  
**V56.SBCFL11/DX**
- With 75mm high cylinder  
**V56.SBCFXL11/DX**
- With inverse function (key removed - round camout)  
**V56.SBCFN11/DX**
- With contact on the left side  
**V56.SBCF11/SX**

You can request versions with one combination of these variations; for example:


With 20mm stroke and 61mm high cylinder, left side  
**V56.SBCFL11/SX/CS.A20**



## ISOLATION

### MB25K Bolt lock

V53.MB25K

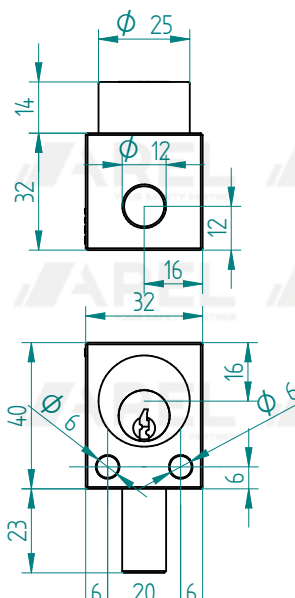

### PRODUCT FEATURES

- » The bolt locks are used to check the cutting operations, engaging or disengaging the organs of command;
- » Compact Bolt Lock.

#### Standard

Stroke of the bolt 8mm  
Diameter of the bolt 12mm  
Cylinder height 14mm

### VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

With side limit switch (left)

**V53.MB25KCF/SX**

With latch inside flush bolt

**V53.MB25K/O8**

With 6mm diameter bolt

**V53.MB25K/D6**

With bolt variable length up to

**V53.MB25K/Lx**

You can request versions with one combination of these variations; for example:


With 6mm bolt diameter and maximum length 10mm

**V53.MB25K/D6-L10**

## ISOLATION

SC  
Camlock

V50.SC1361/DX

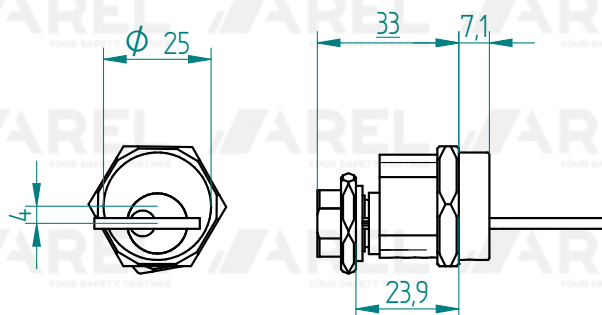

## PRODUCT FEATURES

- » Key lock for switches;
- » Designed for use as an interlock mechanic for electrical panel through a mechanical connection with the isolation lever;
- » Equipped with a holding pin with nut M17;
- » The movement of the shaft closes the isolator;
- » Available with QL1 series key;
- » Material: chromed brass;
- » Ideal for use in corrosive, not corrosive or aggressive environments.

## Standard

Chromed brass  
DX rotation (clockwise to insert and lock the key)  
Cam holder M17

## VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

With M10 threaded male actuator

**V50.SC1361F/DX**

Left rotation

**V50.SC1361/SX**

You can request versions with one combination of these variations; for example:

With male actuator and left rotation

**V50.SC1361F/SX**



## PRODUCTS

### ISOLATION

## SCC Key switch

V52.SC1361C/DX

ISOLATION

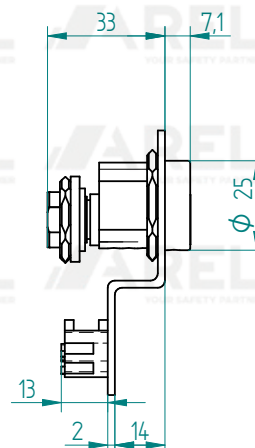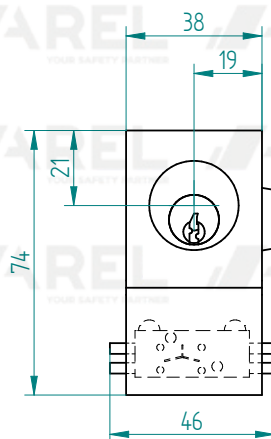

## PRODUCT FEATURES

- » Interlock key;
- » Complete with electrical signaling and monitoring contacts;
- » It is supplied with NO + NC contacts;
- » Available with QL1 series key;
- » Material: chromed brass the cylinder and stainless steel the support plate;
- » Ideal for use in corrosive, not corrosive or aggressive environments.

### Standard

Chrome plated brass  
DX rotation (clockwise to insert and lock the key)

## VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

With 2 contacts (2NO - 2NC)

V52.SC1361-2C/DX





# 05

## **KEY EXCHANGE BOXES PRODUCTS**




## KEY EXCHANGE BOXES

### D

#### Key exchange box

**H70.04/D13**  
(H70.aa/Dbbcc)

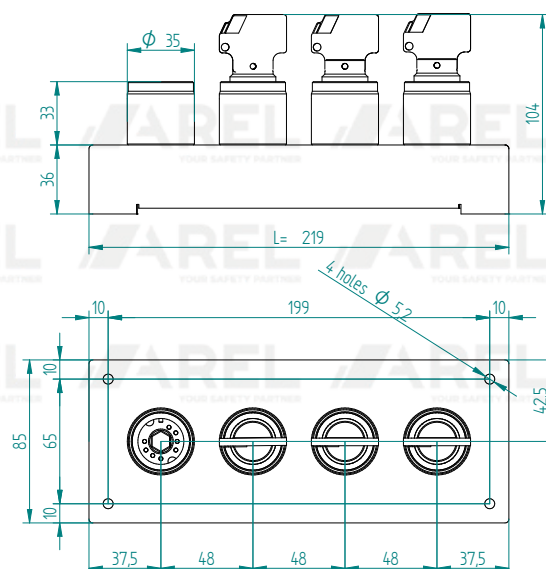

#### PRODUCT FEATURES

- » Designed to enable a sequential key release by inserting an initial group of keys;
- » The need for this type of product usually occurs when there are more points of access to the danger area;
- » Designed to be the connection between the insulation bolt locks and access interlocks;
- » Available in different configurations and number of blocks (b frees c);
- » Material: chrome nickel brass and stainless steel box;
- » Supplied with box suitable for both, front and back-panel mounting;
- » Available with key series QA1.

#### Standard

Unpainted stainless steel box  
 aa = total number of cylinders  
 bb = number of cylinders that release (from left)  
 cc = number of cylinders that are released

#### VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

Endless combinations "bbcc"

**H70.aa/Dbbcc**

Box on 3 rows if aa > 12

Box length on a row


**L = 27 + (aa \* 48)**

## KEY EXCHANGE BOXES

### D-SC

#### Key selector box

H72.04/D1x4/SC1

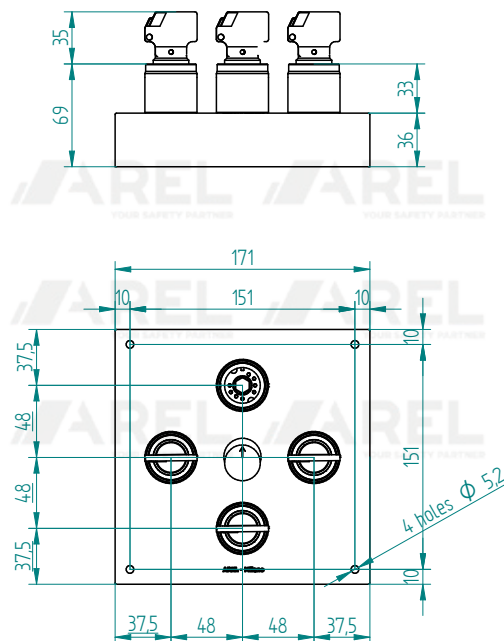

### PRODUCT FEATURES

- » Selective key distributor;
- » Designed for controlled release of keys by positioning the selector knob;
- » Typically used in electrical switchboard applications where you want to ensure that there are no power supplies in parallel;
- » 2 to 4 selector knob positions are available (more than 4 on request);
- » Material: chrome nickel brass and stainless steel box;
- » Supplied with box suitable for both panel and back-panel mounting;
- » Available with key series QA1.

#### Standard

Unpainted stainless steel box  
Selection of the key to be freed

### VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

Selection of the key to be blocked

**H72.04/D1x4/SC3**

3-cylinder version with selection of the key from to free

**H72.03/D1x3/SC1**

3-cylinder version with selection of the key from to block

**H72.03/D1x3/SC2**






## KEY EXCHANGE BOXES

### DB

### Elettro-mechanical interlocking distributor

H81.02/D11BCPX

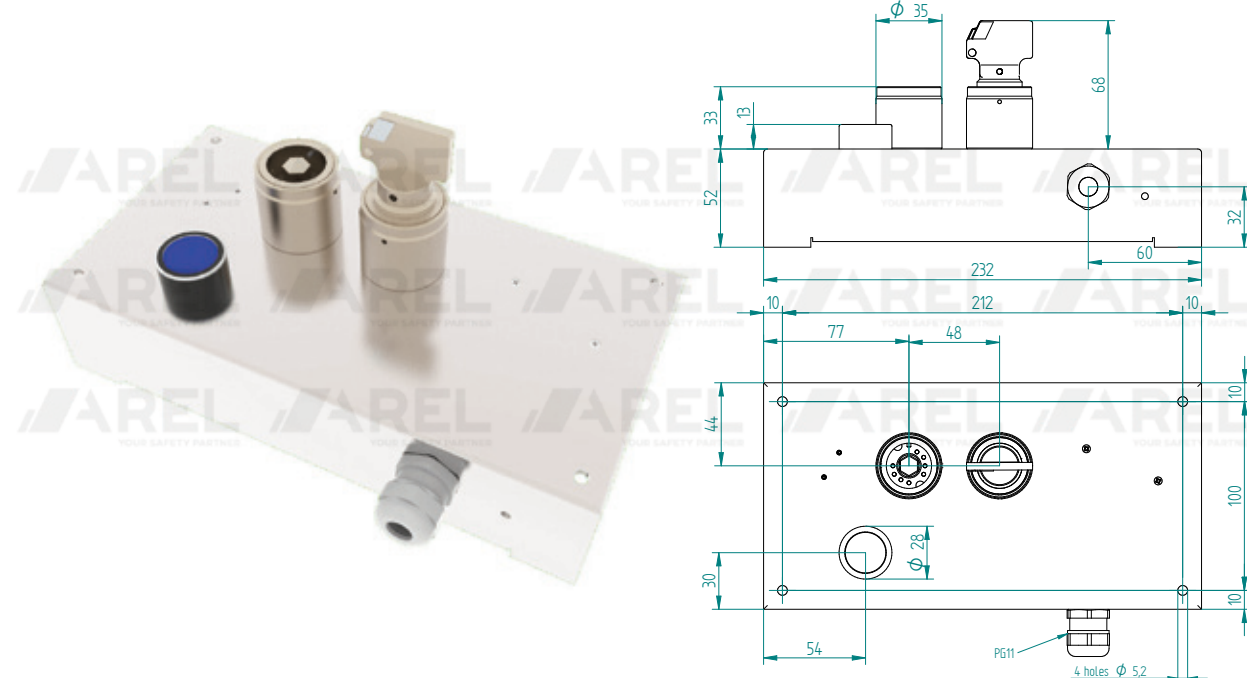

### PRODUCT FEATURES

- » The electromechanical interlock distributors are designed to condition the keys extraction with the help of micro contacts, electromagnets, buttons and timers;
- » Interlock with locked key controlled by solenoid;
- » Material: chrome nickel brass and stainless steel box;
- » Ideal for use in corrosive, non-corrosive and corrosive environments;
- » Supplied ready for front and back-panel assembly.

#### Standard

Unpainted stainless steel box  
One solenoid (B)  
One NO-NC signaling contact on the key (C)  
A blue light button with one NO contact (PX)  
2 meters of multipolar cable  
Solenoid voltage: 110Vdc

### VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

With two non-interlocked cylinders (2 keys inside or outside)

**H81.02/D2BCPX**

With 2 signal contacts (2NO-2NC)

**H81.02/D11B2CPX**

With 2 block electromagnets, 2 contacts and 2 illuminated buttons

**H82.02/D11-2B2C2PX**

With rear cable outlet

**H81.02/D11BCPX/R**

With terminal block on the side (no cables)

**H81.02/D11mBCPX**

With non-luminous button

**H81.02/D11BCP**

With two contacts on the button (2NO)

**H81.02/D11BCPXd**

Other available voltages: 24-48-230Vac / 24-48Vdc

You can request versions with one combination of these variations; for example:

With 2 signal contacts (2NO-2NC) and pushbutton (no light)


**H81.02/D11B2CP**

## KEY EXCHANGE BOXES

### DBT

#### Key distribution with time delay unit

**H83.02/D11BCPXT**

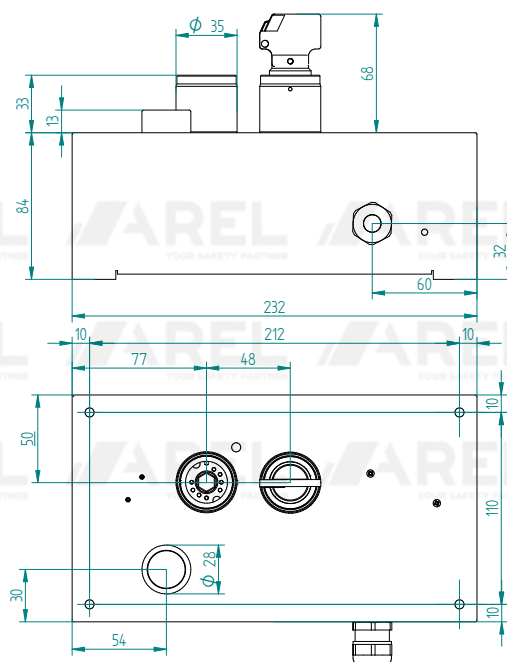

### PRODUCT FEATURES

- » Electromechanical interlocking distributors are designed to condition the extraction keys with the help of micro-contacts,
- electromagnets, buttons and timers. The timer manages the moment when it is possible to get the key because the area is now safe;
- » Interlock with locked key controlled by solenoid;
- » Material: chrome nickel brass and stainless steel box;
- » Ideal for use in corrosive, non-corrosive and corrosive environments;
- » Supplied ready for front and back-panel assembly.

#### Standard

Unpainted stainless steel box  
 One solenoid (B)  
 One NO-NC signal contact on the first key (C)  
 A blue light button with one NO contact (PX)  
 2m of multipolar cable  
 Electromagnet voltage: 110Vdc  
 Relay-Timer set to 12 minutes

### VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

With just one cylinder

**H83.01/D1BCPXT**

With two non-interlocked cylinders (2 keys inside or outside)

**H83.02/D2BCPXT**

With 2 signal contacts (2NO-2NC)

**H83.02/D11B2CPXT**

With 2 block electromagnets

**H83.02/D11-2BCPXT**

With rear cable outlet

**H83.02/D11BCPXT / R**

With terminal block on the side (no cables)

**H83.02/D11MBCPXT**

With non-luminous button

**H83.02/D11BCPT**

With two contacts on the button (2NO)

**H83.02/D11BCPXdt**

Other available voltages: 24-48-230Vac / 24-48Vdc

You can request versions with one combination of these variations; for example:

With 2 signal contacts (2NO-2NC) and pushbutton (no light)

**H83.02/D11-2B2CPT**


## KEY EXCHANGE BOXES

### SD

#### Key exchange box

V70.03/12

(V70.aa/bbcc)

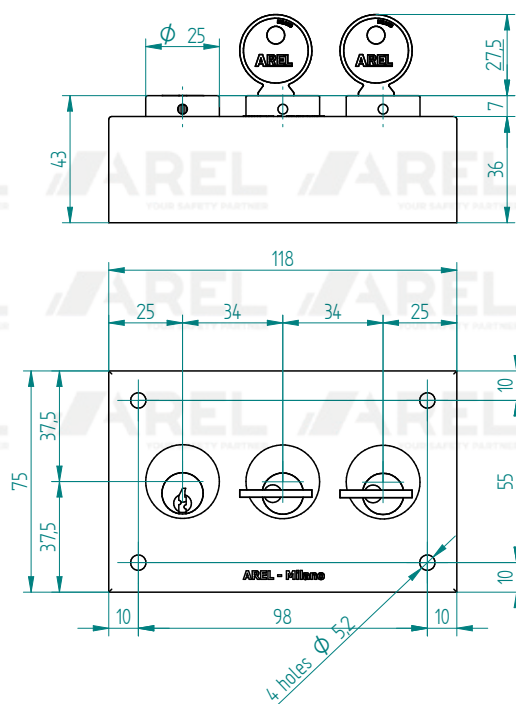

### PRODUCT FEATURES

- » Designed to enable a sequential key release by inserting an initial group of keys;
- » The need for this type of product usually occurs when there are more points of access to the danger area;
- » Designed to be the connection between the insulation bolt locks and access interlocks;
- » Available in different configurations and number of blocks (b frees c);
- » Supplied with box suitable for both, front and back-panel mounting;
- » Available with key series QL1.

#### Standard

Black epoxy painted steel box

aa = total number of cylinders

bb = number of cylinders that release (from left)

cc = number of cylinders that are released

### VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

Unpainted stainless steel box

V71.Xaa / bbcc

Endless combinations "bbcc"

V70.aa/bbcc

Box on 3 rows if aa > 12

Box length on a row


**L = 16 + (aa x 34)**

## KEY EXCHANGE BOXES

**SD-MC**

## Key selector box

V72.03/SD12/S111/MC

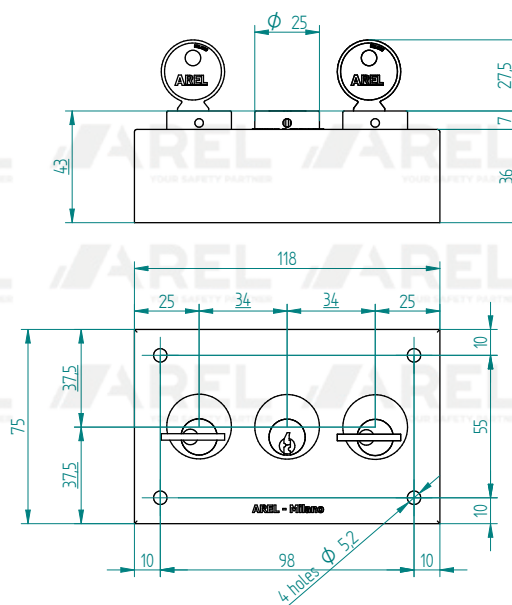**PRODUCT FEATURES**

- » Designed for a controlled release of the keys through the placement of the central selection key with “OR” type logic;
- » 2 or 3 positions are available;
- » Supplied with box suitable for assembly both front and back-panel.

**Standard**

Black epoxy painted steel box

**VARIANTS**

Variants, compared to standard model shown in this page, differ by conditions indicated below:

Unpainted stainless steel box

**V71.X03/SD12/S111/MC**

5-cylinder version

**V72.05/SD14/S212/MC**

You can request versions with one combination of these variations; for example:

With stainless steel box and 5-cylinder version

**V71.X05/SD14/S212/MC**





## KEY EXCHANGE BOXES

### SD-SC

#### Key distributor with knob selector

V72.04/SD1x4/SC1

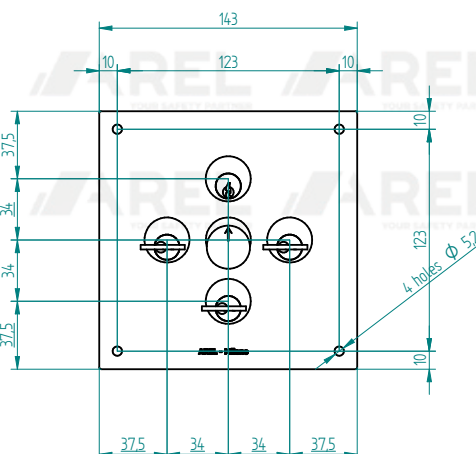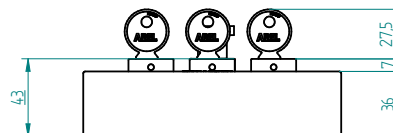

### PRODUCT FEATURES

- » Selective key distributor;
- » Designed for controlled release of keys by positioning the selector knob;
- » Release any number of keys in a predetermined sequence and by different combinations;
- » Typically used in electrical switchboard applications where you want to ensure that there are no power supplies in parallel;
- » 2 to 4 selector knob positions are available (more than 4 on request);
- » Supplied with box suitable for both panel and back-panel mounting;
- » Available with key series QL1.

#### Standard

Black epoxy painted steel box  
Selection of the key to be freed

### VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

Unpainted stainless steel box

**V71.X04/SD1x4/SC1**

Selection of the key to be blocked

**V72.04/SD1x4/SC3**

2-cylinder version with selection of the key from to free

**V72.02/SD1x2/SC**

3-cylinder version with selection of the key from to free

**V72.03/SD1x3/SC1**

3-cylinder version with selection of the key from to block

**V72.03/SD1x3/SC2**

You can request versions with one combination of these variations; for example:

With stainless steel box and 3-cylinder version



**V71.X03/SD1x3/SC2**

## KEY EXCHANGE BOXES

## SDB

## Electro-mechanical key distribution

V81.01/SD1BCPX

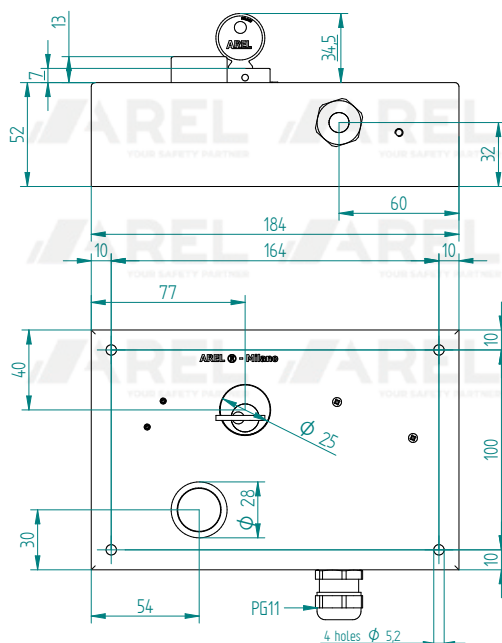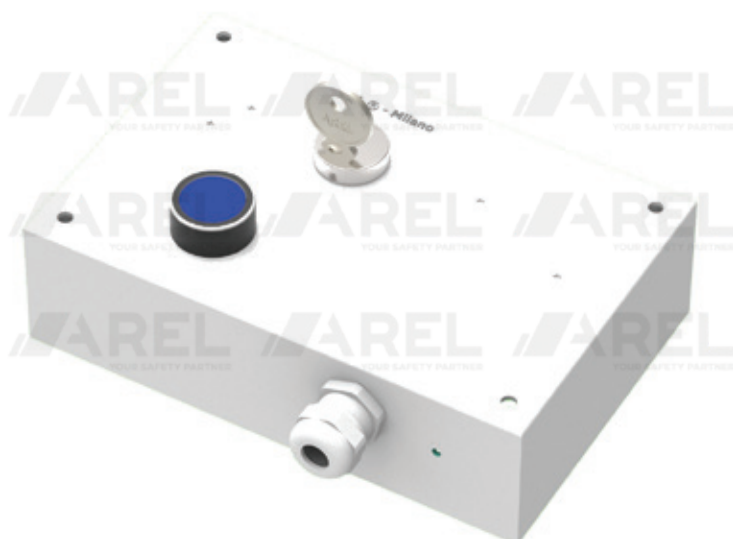

## PRODUCT FEATURES

- » The electromechanical interlock distributors are designed to condition the keys extraction with the help of micro contacts, electromagnets, buttons and timers;
- » Interlock with locked key controlled by solenoid;
- » Material: chromed brass and stainless steel;
- » Ideal for use in corrosive, non-corrosive and corrosive environments;
- » Supplied ready for front and back-panel assembly.

## Standard

RAL7035 painted stainless steel box  
 One key extraction block electromagnet (B)  
 One NO-NC signaling contact on the key (C)  
 A blue light button to a NO contact (PX)  
 2 meters of multipolar cable  
 Solenoid voltage: 110Vdc

## VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

With 2 signal contacts (2NO-2NC)

**V81.01/SD1B2CPX**

With key locked on insertion

**V81.01/SD1BCPX/V**

With key lock in both positions

**V81.01/SD1BCPX/OV**

With rear cable outlet

**V81.01/SD1BCPX/R**

With terminal block on the side (no cables)

**V81.01/SD1mBCPX**

With non-luminous button

**V81.01/SD1BCP**

With two contacts on the button (2NO)

**V81.01/SD1BCPXd**

Other available voltages: 24-48-230Vac / 24-48Vdc

You can request versions with one combination of these variations; for example:


With 2 signal contacts (2NO-2NC) and terminal  
**V81.01/SD1mB2CPX**

## KEY EXCHANGE BOXES

### SDB

#### Electro-mechanical key distribution

V81.02/SD11BCPX

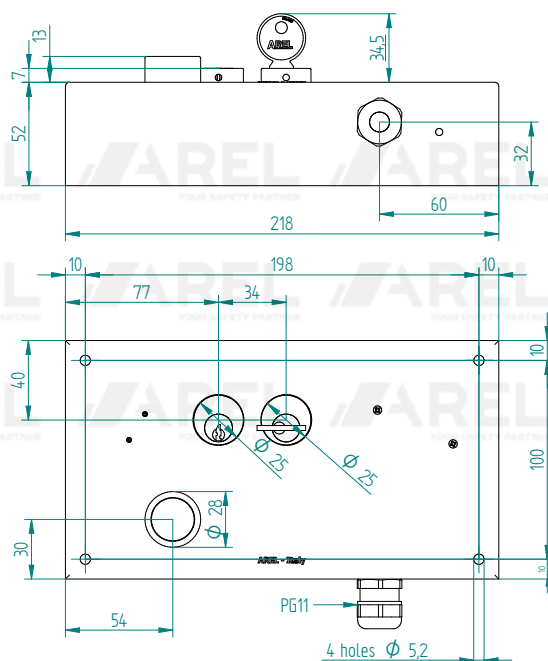

### PRODUCT FEATURES

- » The electromechanical interlock distributors are designed to condition the keys extraction with the help of micro contacts, electromagnets, buttons and timers;
- » Interlock with locked key controlled by solenoid;
- » Material: chromed brass and stainless steel;
- » Ideal for use in corrosive, non-corrosive and corrosive environments;
- » Supplied ready for front and back-panel assembly.

#### Standard

RAL7035 painted stainless steel box  
One key extraction block electromagnet (B)  
One NO-NC signaling contact on the key (C)  
A blue light button to a NO contact (PX)  
2 meters of multipolar cable  
Solenoid voltage: 110Vdc

### VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

With two non-interlocked cylinders (2 keys inside or outside)

**V81.02/SD2BCPX**

With 2 signal contacts (2NO-2NC)

**V81.02/SD11B2CPX**

With 2 block electromagnets

**V81.02/SD11-2BCPX**

With rear cable outlet

**V81.02/SD11BCPX/R**

With terminal block on the side (no cables)

**V81.02/SD11mBCPX**

With non-luminous button

**V81.02/SD11BCP**

With two contacts on the button (2NO)

**V81.02/SD11BCPXD**

Other available voltages: 24-48-230Vac / 24-48Vdc

You can request versions with one combination of these variations; for example:

With 2 signal contacts (2NO-2NC) and pushbutton (no light)


**V81.02/SD11B2CP**

## KEY EXCHANGE BOXES

## SDBT

## Key distribution with delay unit

V83.02/SD11BCPX

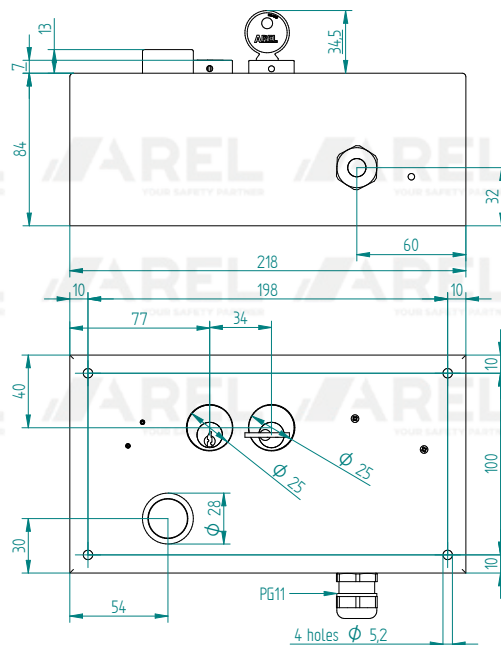

## PRODUCT FEATURES

- » The electromechanical interlock distributors are designed to condition the keys extraction with the help of micro contacts, electromagnets, buttons and timers;
- » The timer manages the moment when it is possible to get the key because the area is now safe;
- » Interlock with locked key controlled by solenoid;
- » Material: chromed brass and stainless steel;
- » Ideal for use in corrosive, non-corrosive and corrosive environments;
- » Supplied ready for front and back-panel assembly;
- » Available voltages: 24, 48, 110 and 230 Vac or Vdc.

## Standard

RAL7035 painted stainless steel box  
 One key extraction block electromagnet (B)  
 One NO-NC signaling contact on the key (C)  
 A blue light button to a NO contact (PX)  
 2 meters of multipolar cable  
 Solenoid voltage: 110Vdc  
 Relay-Timer set to 12 minutes

## VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

With just one cylinder  
**V83.01/SD1BCPX**

With two non-interlocked cylinders (2 keys inside or outside)  
**V83.02/SD2BCPX**

With 2 signal contacts (2NO-2NC)  
**V83.02/SD11B2CPX**

With 2 block electromagnets  
**V83.02/SD11-2BCPX**

With rear cable outlet  
**V83.02/SD11BCPX/R**

With terminal block on the side (no cables)  
**V83.02/SD11MBCPX**

With non-luminous button  
**V83.02/SD11BCPT**

With two contacts on the button (2NO)  
**V83.02/SD11BCPXD**

Other available voltages: 24-48-230Vac / 24-48Vdc

You can request versions with one combination of these variations; for example:

With 2 signal contacts (2NO-2NC) and terminal  
**V83.02/SD11-2B2CPX**



# 06



## **CONTROL ACCESS** **PRODUCTS**



## ACCESS CONTROL

### DP Single key door lock

**H65.DP1**

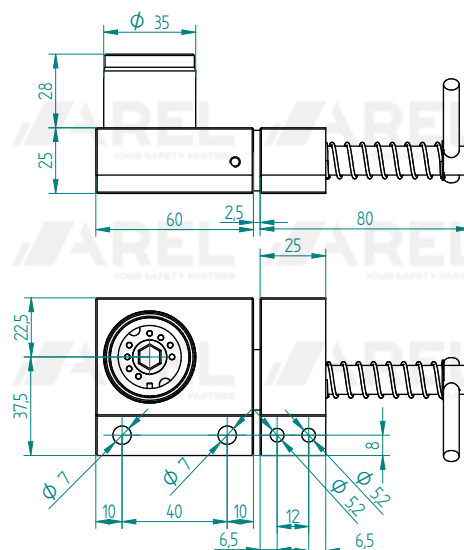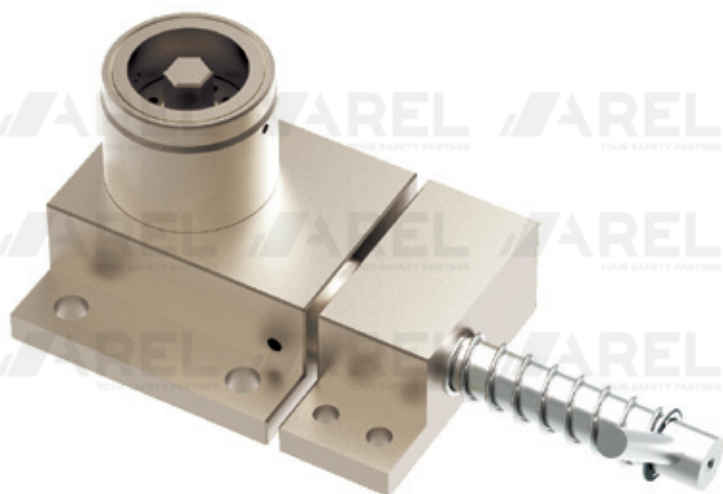

### PRODUCT FEATURES

- » Single key door lock for partial access (visible operator);
- » Ideal for use on swing doors or sliding;
- » Material: chrome nickel brass;
- » This lock has been designed to be easily installed when standard installation is not possible or unsuitable. For example: sliding doors, containers or inspection hatches;
- » Ideal for use in standard, corrosive and heavy-duty environments;
- » Supplied for front panel mounting;
- » Bolt cutting force: 24KN.

#### Standard

Door hinged on the left  
Brass  
Stainless steel handle and spring

### VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

Without bracket and handle with chain (15cm)

**H65.DP1ck**

Door hinged on the right

**H65.DP1/180**

You can request versions with one combination of these variations; for example:

Without bracket and hinged door on the right


**H65.DP1ck/180**

## ACCESS CONTROL

### DP

### Single key swing door lock

#### H65.DP1Us

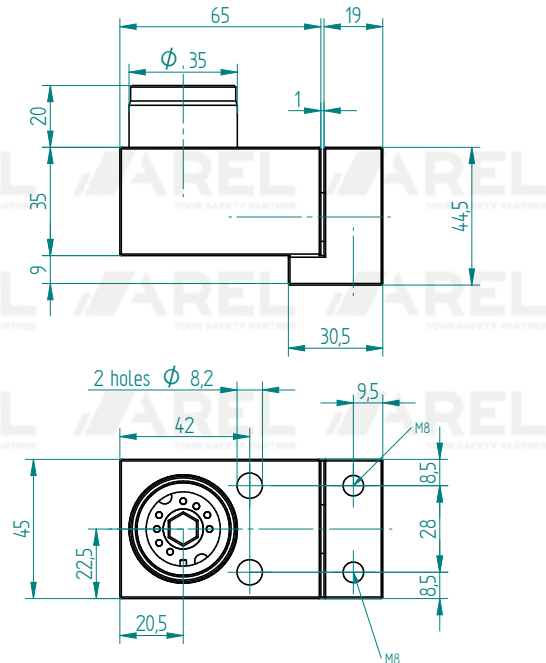

## PRODUCT FEATURES

- » Single key door lock for partial access (visible operator);
- » Ideal for use on swing doors;
- » Includes a lock body and a latch mounted on the jamb;
- » Material: chrome nickel brass;
- » Ideal for use in standard, corrosive and heavy-duty environments;
- » Supplied for front and back panel mounting
- » Bolt cutting force: 24KN.

### Standard

Door hinged on the left  
Brass

## VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:


Door hinged on the right  
**H65.DP1Us/180**

## ACCESS CONTROL

### DP

### Dual key access interlock

#### H65.DP2

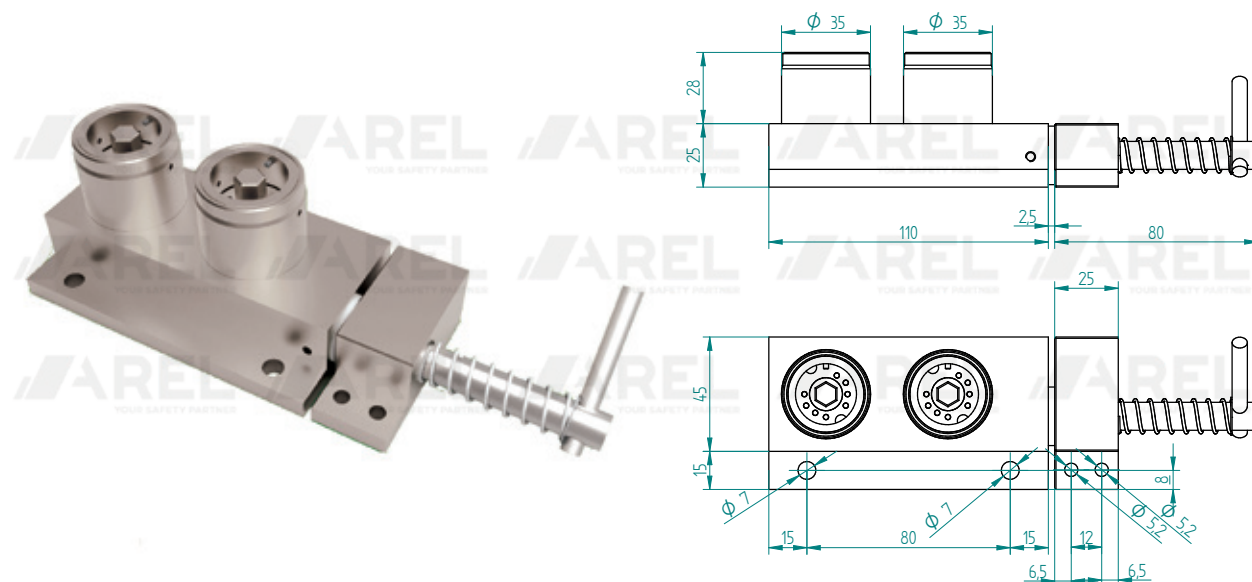

### PRODUCT FEATURES

- » Dual key door lock for partial access (visible operator);
- » Ideal for use on swing or sliding doors;
- » Material: chrome nickel brass;
- » This lock has been designed to be easily installed when standard installation is not possible or unsuitable. For example: sliding doors, containers or inspection hatches;
- » Ideal for use in standard, corrosive and heavy-duty environments;
- » Supplied for front panel mounting;
- » Bolt cutting force: 24K.

### Standard

Door hinged on the left  
Brass  
Stainless steel handle and spring

### VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

Without bracket and handle with chain (15cm)

**H65.DP2ck**

Door hinged on the right

**H65.DP2/180**


You can request versions with one combination of these variations; for example:

Without bracket and hinged door on the right

**H65.DP2CK/180**



**DP**  
**Dual interlocked key access interlock**  
**FULL BODY ACCESS**

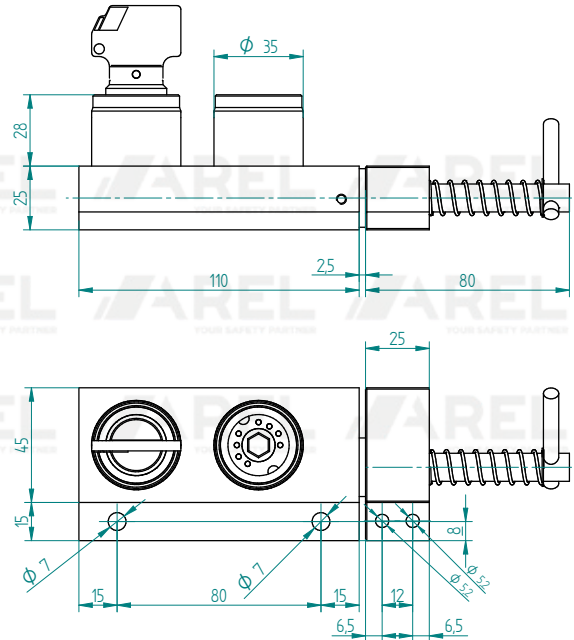

- » Dual key door lock for full body access (not visible operator);
- » Ideal for use on swing or sliding doors;
- » Material: chrome nickel brass;
- » This lock has been designed to be easily installed when standard installation is not possible or unsuitable. For example: sliding doors, containers or inspection hatches;
- » Ideal for use in standard, corrosive and heavy-duty environments;
- » Supplied for front panel mounting;
- » Bolt cutting force: 24K.

Door hinged on the left  
Brass  
Stainless steel handle and spring

Variants, compared to standard model shown in this page, differ by conditions indicated below:

Without bracket and handle with chain (15cm)

H65.DPN2ck

Door hinged on the right

H65.DPN2/180

You can request versions with one combination of these variations; for example:

Without bracket and hinged door on the right

H65.DPN2ck/180




## ACCESS CONTROL

## SBP

## Single key door lock

## V65.SBP1

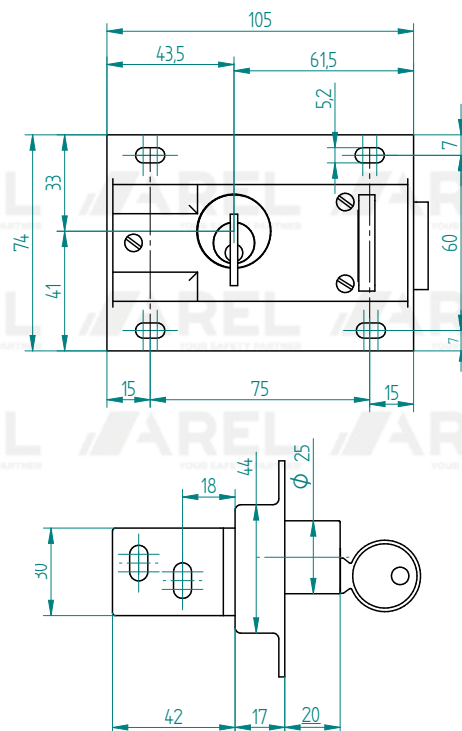

## PRODUCT FEATURES

- » The door locks are installed on the doors of the MV/HV transformer boxes and in all the places where maximum safety is required;
- » Single-key door lock for partial access (visible operator);
- » Ideal for use on swing doors;
- » Material: chromed brass and stainless steel;
- » Supplied ready for back panel mounting.

## Standard

“N” type bracket  
Cylinder height 25mm  
Door hinged on the left

## VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

With “D” type bracket

**V65.SBP1/STAF-D**

With “L” type bracket

**V65.SBP1/STAF-L**

Door hinged on the right

**V65.SBP1/180**

56mm high cylinder

**V65.SBPL1**

70mm high cylinder

**V65.SBPXL1**

You can request versions with one combination of these variations; for example:

With “D” bracket and 70mm high cylinder


**V65.SBPXL1 STAF-D**

## ACCESS CONTROL

### SEP

#### Special erection plate

##### V90.SEP1-P36MW/BP

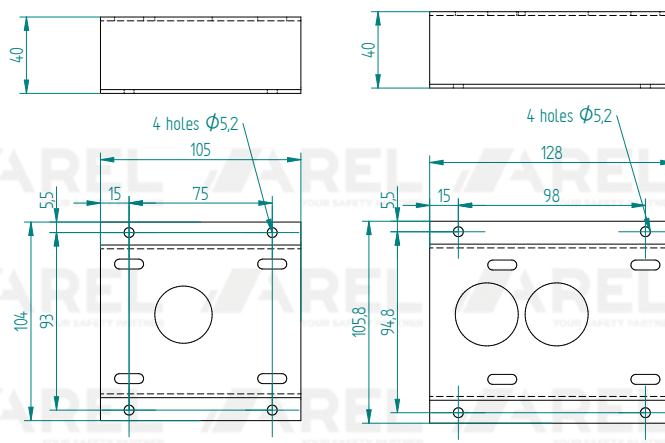

### PRODUCT FEATURES

» The SEP has been designed to install door locks in cases where standard installation is not possible or unsuitable. For example: sliding doors, containers or inspection hatches. The SEP must necessarily be accompanied by a chain connected to the bracket; also the bracket is not the standard one, but the type «D».

#### Standard

Stainless steel  
Accessories: chain with plate to be welded e  
"D" type bracket (V90.CATENAxSEP)

### VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

Chain with bolt and "D" type bracket

**V90.CATENAxSEP**


SEP for double-key door lock

**V90.SEP2-P36MW / BP**


### SBP

#### Mounting bracket

##### V67 mounting bracket for SBP N-L

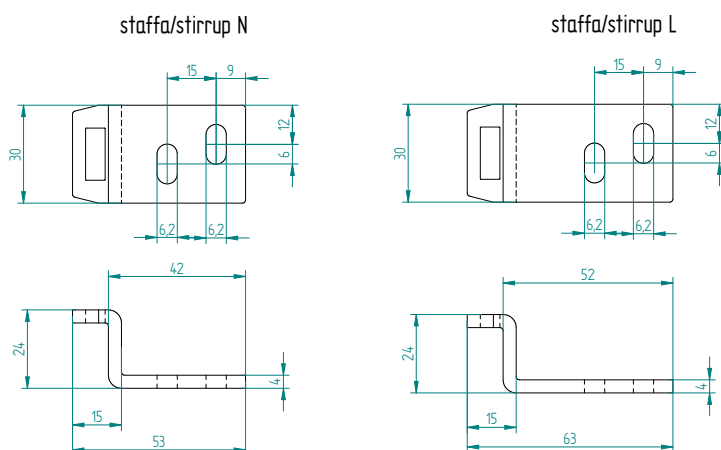

##### V67 mounting bracket for SBP P-D

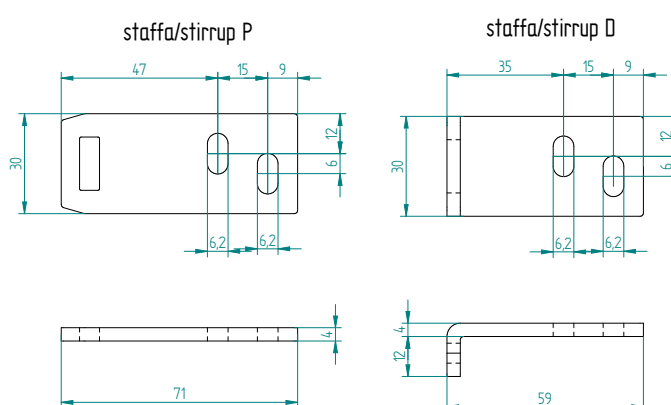


## ACCESS CONTROL

## SBP

## Dual key access interlock

## V70.SBP2

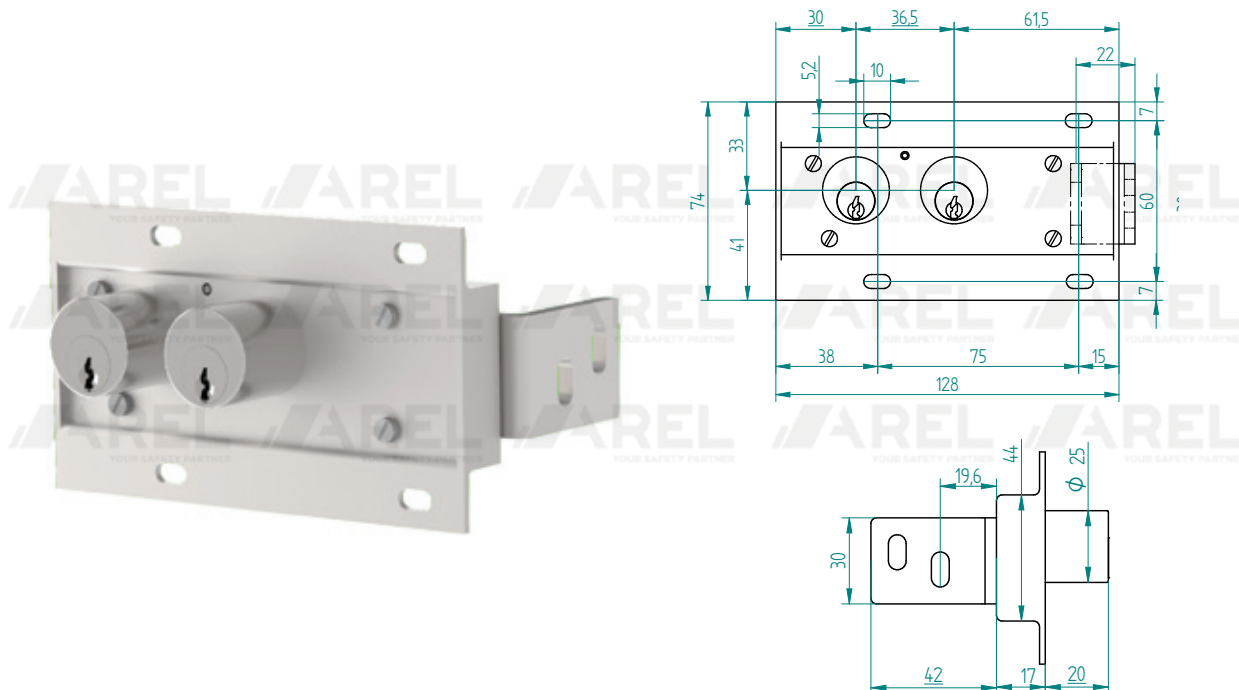

## PRODUCT FEATURES

- » The door locks are installed on the doors of the MV/HV transformer boxes and in all the places where maximum safety is required;
- » Double-key door lock lock for partial access (visible operator);
- » A double authorization is required for opening;
- » Ideal for use on swing doors;
- » Material: chromed brass and stainless steel;
- » Supplied ready for back panel mounting.

## Standard

"N" type bracket  
Cylinder height 25mm  
Door hinged on the left

## VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

With "D" type bracket

**V65.SBP2/STAF-D**

With "L" type bracket

**V65.SBP2/STAF-L**

Door hinged on the right

**V65.SBP2/180**

56mm high cylinder

**V65.SBPL2**

70mm high cylinder

**V65.SBPXL2**

You can request versions with one combination of these variations; for example:

With "D" bracket and 70mm high cylinder



**V65.SBPXL2/STAF-D**

## ACCESS CONTROL

### SBP

#### Dual interlocked key access interlock FULL BODY ACCESS

##### V65.SBPN2

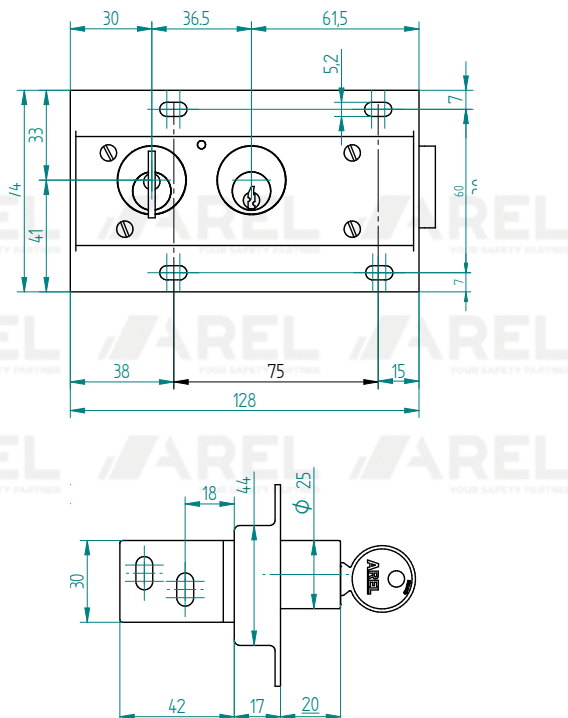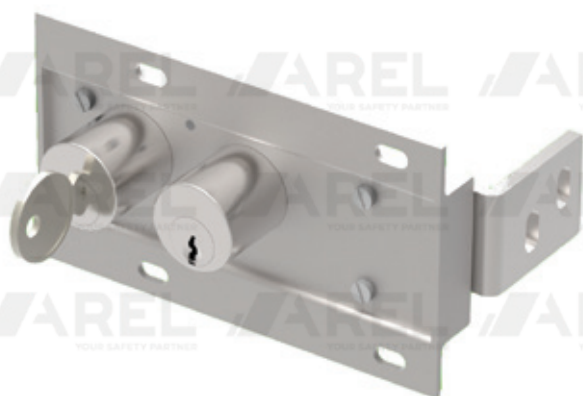

### PRODUCT FEATURES

- » The door locks are installed on the doors of the MV/HV transformer boxes and in all the places where maximum safety is required;
- » Dual key door lock for full body access (not visible operator);
- » Ideal for use on swing doors;
- » Material: chromed brass and stainless steel;
- » Supplied ready for back panel mounting.

#### Standard

"N" type bracket  
Cylinder height 25mm  
Door hinged on the left

### VARIANTS

Variants, compared to standard model shown in this page, differ by conditions indicated below:

With "D" type bracket

**V65.SBPN2/STAF-D**

With "L" type bracket

**V65.SBPN2/STAF-L**

Door hinged on the right

**V65.SBPN2/180**

56mm high cylinder

**V65.SBPNL2**

70mm high cylinder

**V65.SBPNXL2**

You can request versions with one combination of these variations; for example:

With "D" bracket and 70mm high cylinder

**V65.SBPNXL2/STAF-D**







# 07

**KEYS**  
**PRODUCTS**



## KEYS

**QA**  
Keys**H85****PRODUCT FEATURES**

- » A selection of keys is available to suit a wide range of applications;
- » Range of keys in chrome nickel brass;
- » Custom coding: SYMBOL (CODE) to request when ordering:

**Select up to 15 characters:**

- » Any alphanumeric (A-Z) and (0-9) configuration;
- » Master keys available.

### KEYS

## QL Keys

### V85



**V85.QL1**

### PRODUCT FEATURES

- » Silver Nickel;
- » Master keys available (code V36);
- » Custom coding: SYMBOL (CODE) to request when ordering:

**DOT-PIN engraving:**

**Select up to 7 characters:**

- » Any alphanumeric (A-Z) and (0-9) configuration;

**LASER engraving:**

**Select up to 15 characters:**

- » Any alphanumeric (A-Z) and (0-9) configuration;

- » Master keys available.









[www.newarel.com](http://www.newarel.com)

NEW AREL SRL  
Via Carnevali, 14  
20158 Milan ITALY  
ph +39 02 39 32 03 25  
P.IVA/VAT IT08197180964